



NETGEAR

WGR613V WIRELESS ROUTER WITH PHONE ADAPTER

MINIMUM SYSTEM REQUIREMENTS

Before installing the NETGEAR WGR613V Wireless Router with Phone Adapter, please make sure that your computer system has the following:

- Broadband Internet connection via cable or DSL modem.
- Home analogue telephone with a single line.
- For DSL Service: You may need information such as the DSL login name/ email address and password in order to complete the WGR613V set up.

INSTALLATION WGR613V

This guide shows you how to set up your WGR613V.

1. SET UP THE NETWORK CONNECTIONS

IMPORTANT: If you have a home router, disconnect it, then follow the instructions to install the WGR613V. Connecting the WGR613V to another router is not a supported network configuration.

- Unplug the power cable from your modem. Make sure that you have turned your computer off and that you DO NOT plug in the WGR613V voice adapter until instructed to do so.
- Disconnect the Ethernet cable from the back of your PC and then plug it into the Internet Port on the WGR613V.
- Connect one end of the Ethernet cable we provide into the PC port on the WGR613V. Connect the other end of this Ethernet cable into the Ethernet port on the computer.
- Connect a telephone to the WGR613V Phone port.


Your network cables are connected and you are ready to restart your network.

WARNING: DO NOT connect your telephone cable from the telephone port of your WGR613V straight into the telephone PSTN wall socket; This will cause your WGR613V to Malfunction.

2. THEN, INSTALL THE WGR613V WIRELESS ROUTER WITH PHONE ADAPTER


WARNING: Failure to restart your network in the correct sequence could prevent you from connecting to the Internet.

- Power on the modem. **Wait about two minutes for it to start up.**
- Plug the power cable into the WGR613V Power port, and plug the other end into an electrical outlet. This turns on your WGR613V Broadband Voice Adapter. You do not need to unplug it when not in use.
- Check that the Power light (⏻) on the Voice Adapter is illuminated. **Wait at least five minutes for the phone adapter to start up.**

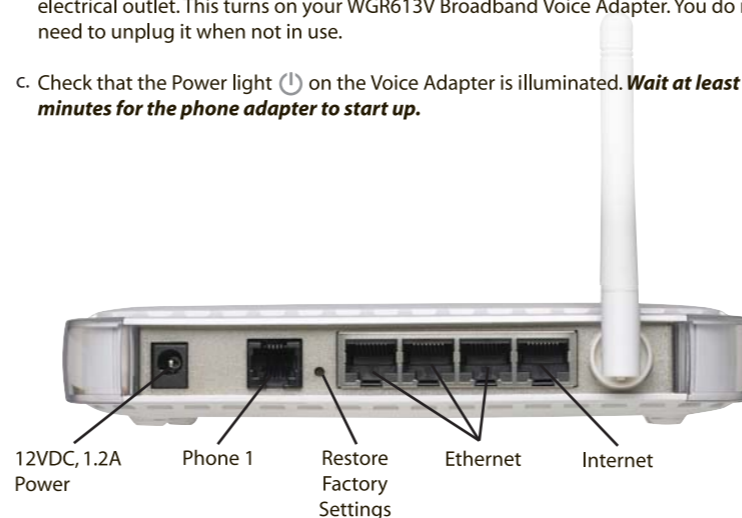

There may be updates that need to be downloaded such as new firmware or changes to your features. **Do not interrupt the registration process by unplugging the power or lifting the receiver on your phone during the start-up process. Interruption of the startup may result in interruption of service.**

- The status light on the front of the WGR613V will flash. Wait five minutes before continuing.

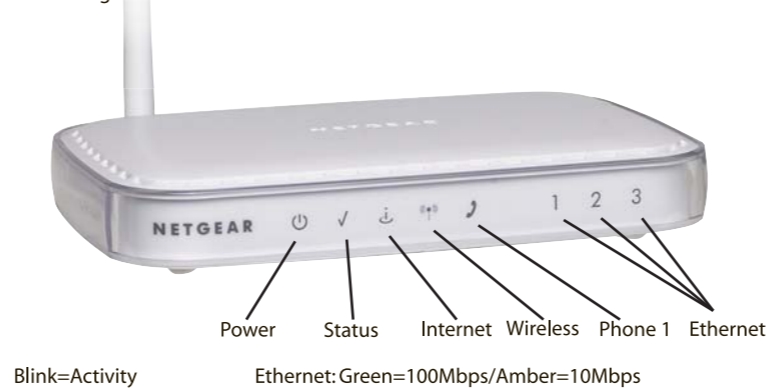

- Turn on your computer.

- Check the wireless router lights. If they do not match the settings below, check that all equipment is powered on and the Ethernet connections are secure. You can also see the Troubleshooting Tips in this guide.



- **Power:** The Power light should turn solid green.
- **Status:** The Status light blinks when the wireless router is first turned on, then goes off.
- **Internet:** The Internet port light should be lit.
- **Wireless:** The Wireless light should be lit.
- **LAN:** A LAN light should be lit. Green indicates your computer is communicating at 100 Mbps; amber indicates 10 Mbps.
- **Phone 1:** The Phone 1 light should be flashing amber or solid green. Flashing amber indicates that the WGR613V is attempting to connect to MyNetFone. Solid green indicates that the WGR613V has connected successfully.

3. LOG IN TO THE WIRELESS ROUTER

- Open a new web browser window.
- Type **http://192.168.61.1** in your browser address bar.
- When prompted, enter **admin** for the user name and **password** for the password, both in lower case letters, and click OK.

Note: If you do not connect to the wireless router, verify that your computer is set up for DHCP.

4. RUN THE SETUP WIZARD TO CONNECT TO THE INTERNET

- If you do not see this menu, click Setup Wizard on the upper left of the main menu.
- Click Next and input ISP settings.
- At the end of the Setup Wizard, click Apply to save your settings.
- Click Test to verify your Internet connection.



5. SET UP AN ACCOUNT AT MYNETFONE

Follow this step if you have not yet entered your details on the MyNetFone web site.

- Power up the computer.
- Use a Web browser to go to the MyNetFone web site, <http://www.mynetfone.com.au/register/> Follow the instructions to set up your account. During this process, MyNetFone will verify your system configuration and phone set up. You will be asked to provide the following information:
 - Enter the serial number and MAC address of your WGR613V, located on the base of the unit.
 - Enter your name and contact information.
 - Select your MyNetFone plan.visit: <http://www.mynetfone.com.au/plans/> for more information.
- After registration, you will be required to reboot your WGR613V.
- Pick up your telephone handset and listen for a dial tone. If you hear a dial tone then you have finished installation and may begin making calls. For dialing instructions, see the Helpful Hints on this card. If you do not hear a dial tone, see Troubleshooting. For more tips about troubleshooting, see the User Manual.
- To check you MyNetFone number dial 151 and select option 2.

TROUBLESHOOTING

If you have no dial tone, check the following:

- Make sure the phone is plugged into the phone port on the WGR613V.
- Make sure the Internet light on the WGR613V is active and the Phone 1 light is solid green. If not, check your connection to the Internet. Try rebooting your modem. If that does not work, contact **MyNetFone Customer Care**.
- The Voice Adapter is not supposed to be used behind a Router. Please connect it directly to the modem.

Here are some tips for correcting simple problems you may have.

Be sure to restart your network in this sequence:

- Turn off the modem, wireless router, and computer;
- Turn on the modem, wait two minutes;
- Turn on the wireless router and wait two minutes;
- Turn on the computer.

Make sure the Ethernet cables are securely plugged in.

- The Internet status light on the wireless router will be lit if the Ethernet cable from the wireless router to the modem is plugged in securely and the modem and wireless router are turned on.
- For each powered on computer connected to the wireless router with a securely plugged in Ethernet cable, the corresponding wireless router LAN port status light will be lit. The label on the bottom of the wireless router identifies the number of each LAN port.

Make sure the wireless settings in the computer and router match exactly.

The Wireless Network Name (SSID) WEP security settings of the router and wireless computer must match exactly.

HELPFUL HINTS

- If you experience any problems concerning the MyNetFone service you can call our national customer care centre.

Australia: 1300 731 048 support@mynetfone.com.au


New Zealand: 0800 686 383 support@mynetfone.co.nz

- Below are some useful numbers that you can call from your WGR613V anytime.

121 - Voicemail collection and setup
151 - Account balance and recharge
181 - Customer Care Centre

- Don't forget to visit our customer account web portal online. You can:

- Check your balance
- Access your call records
- Recharge from the convenience of a webpage, visit: <http://www.mynetfone.com.au/> and follow the My Account link.

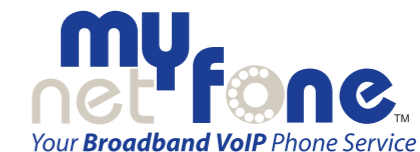

www.mynetfone.com.au or call us on **1300 731 048**
www.mynetfone.co.nz or call us on **0800 686 383**