



HAWNR1

## HI-GAIN™ WIRELESS-150N ROUTER with Range Amplifier

website [www.hawkingtech.com](http://www.hawkingtech.com)  
e-mail [techsupport@hawkingtech.com](mailto:techsupport@hawkingtech.com)

© COPYRIGHT 2010 HAWKING TECHNOLOGY, INC. ALL RIGHTS RESERVED.

**USER'S MANUAL** ▶▶

# COPYRIGHT

Copyright ©2010 by Hawking Technologies, Inc. All rights reserved. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual or otherwise, without the prior written permission of this company

## LIMITED WARRANTY

Hawking Technology guarantees that every HAWNR1 Wireless-150N Router with Range Amplifier is free from physical defects in material and workmanship under normal use for one (1) year from the date of purchase. If the product proves defective during this one-year warranty period, call Hawking Customer Service in order to obtain a Return Authorization number. Warranty is for repair or replacement only. Hawking Technology does not issue any refunds. BE SURE TO HAVE YOUR PROOF OF PURCHASE. RETURN REQUESTS CAN NOT BE PROCESSED WITHOUT PROOF OF PURCHASE. When returning a product, mark the Return Authorization number clearly on the outside of the package and include your original proof of purchase.

IN NO EVENT SHALL HAWKING TECHNOLOGY'S LIABILITY EXCEED THE PRICE PAID FOR THE PRODUCT FROM DIRECT, INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OF THE PRODUCT, ITS ACCOMPANYING SOFTWARE OR ITS DOCUMENTATION. Hawking Technology makes no warranty or representation, expressed, implied or statutory, with respect to its products or the contents or use of this documentation and all accompanying software, and specifically disclaims its quality, performance, merchantability, or fitness for any particular purpose. Hawking Technology reserves the right to revise or updates its products, software, or documentation without obligation to notify any individual or entity. Please direct all inquiries to:  
[techsupport@hawkingtech.com](mailto:techsupport@hawkingtech.com)

# Federal Communication Commission

## Interference Statement

### FCC Part 15

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

1. Reorient or relocate the receiving antenna.
2. Increase the separation between the equipment and receiver.
3. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
4. Consult the dealer or an experienced radio technician for help.

### FCC Caution

This equipment must be installed and operated in accordance with provided instructions and a minimum 20 cm spacing must be provided between computer mounted antenna and person's body (excluding extremities of hands, wrist and feet) during wireless modes of operation.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including

interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the authority to operate equipment.

**Federal Communication Commission (FCC) Radiation Exposure Statement**

This equipment complies with FCC radiation exposure set forth for an uncontrolled environment. In order to avoid the possibility of exceeding the FCC radio frequency exposure limits, human proximity to the antenna shall not be less than 20cm (8 inches) during normal operation.

The antenna(s) used for this transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

# **R&TTE Compliance Statement**

This equipment complies with all the requirements of DIRECTIVE 1999/5/EC OF THE EUROPEAN PARLIAMENT AND THE COUNCIL of March 9, 1999 on radio equipment and telecommunication terminal Equipment and the mutual recognition of their conformity (R&TTE).

The R&TTE Directive repeals and replaces in the directive 98/13/EEC (Telecommunications Terminal Equipment and Satellite Earth Station Equipment) As of April 8, 2000.

## **Safety**

This equipment is designed with the utmost care for the safety of those who install and use it. However, special attention must be paid to the dangers of electric shock and static electricity when working with electrical equipment. All guidelines of this and of the computer manufacture must therefore be allowed at all times to ensure the safe use of the equipment.

## **EU Countries Intended for Use**

The ETSI version of this device is intended for home and office use in Austria, Belgium, Denmark, Finland, France, Germany, Greece, Ireland, Italy, Luxembourg, the Netherlands, Portugal, Spain, Sweden, and the United Kingdom.

The ETSI version of this device is also authorized for use in EFTA member states: Iceland, Liechtenstein, Norway, and Switzerland.

## **EU Countries NOT intended for use**

None.

# **C O N T E N T S**

## **CHAPTER I: PRODUCT INFORMATION**

1-1 Introduction and safety information

1-2 Safety Information

1-3 System Requirements

1-4 Package Contents

1-5 Product Overview

## **CHAPTER II: SYSTEM AND NETWORK SETUP**

2-1 Build network connection

2-2 Connecting to wireless broadband router by web browser

2-2-1 Windows 95/98/Me IP address setup

2-2-2 Windows 2000 IP address setup

2-2-3 Windows XP IP address setup

2-2-4 Windows Vista IP address setup

2-2-5 Router IP address lookup

2-3 Using 'Quick Setup'

2-3-1 Setup procedure for 'Cable Modem'

2-3-2 Setup procedure for 'Fixed-IP xDSL'

2-3-3 Setup procedure for 'PPPoE xDSL'

2-3-4 Setup procedure for 'PPTP xDSL'

2-3-5 Setup procedure for 'L2TP xDSL'

2-3-6 Setup procedure for 'Telstra Big Pond'

2-4 Basic Setup

2-4-1 Time zone and time auto-synchronization

2-4-2 Change management password

2-4-3 Remote Management

2-5 Setup Internet Connection (WAN Setup)

2-5-1 Setup procedure for 'Dynamic IP'

2-5-2 Setup procedure for 'Static IP'

2-5-3 Setup procedure for 'PPPoE'

2-5-4 Setup procedure for 'PPTP'

2-5-5 Setup procedure for 'L2TP'

2-5-6 Setup procedure for 'DNS'

2-5-7 Setup procedure for 'DDNS'

2-6 Wired LAN Configuration

2-6-1 LAN IP section

2-6-2 DHCP Server

2-6-3 Static DHCP Leases Table

2-7 Wireless Network

2-7-1 Basic Wireless Settings

2-7-1-1 Setup procedure for 'AP'

2-7-1-2 Setup procedure for 'Station (Infrastructure)'

2-7-1-3 Setup procedure for 'AP Bridge (Point to Point)'

2-7-1-4 Setup procedure for 'AP Bridge (Point to Multi Point)'

2-7-1-5 Setup procedure for 'AP Bridge (WDS)'

2-7-1-6 Setup procedure for 'Universal Repeater'

2-7-2 Advanced Wireless Settings

2-7-3 Security Settings

2-7-3-1 Disable wireless security

2-7-3-2 Wired Equivalent Privacy (WEP)

2-7-3-3 Wi-Fi Protected Access (WPA)

2-7-3-4 WPA RADIUS

2-7-4 Wireless Access Control

2-7-5 Wi-Fi Protected Setup (WPS)

2-7-6 Security Tips for Wireless Network

## **CHAPTER III: ADVANCED FUNCTIONS**

### **3-1 Quality of Service (QoS)**

#### **3-1-1 Basic QoS Settings**

#### **3-1-2 Add a New QoS Rule**

### **3-2 Network Address Translation (NAT)**

#### **3-2-1 Basic NAT Settings (Enable or disable NAT function)**

#### **3-2-2 Port Forwarding**

#### **3-2-3 Virtual Server**

#### **3-2-4 Port Mapping for Special Applications**

#### **3-2-5 UPnP Setting**

#### **3-2-6 ALG Settings**

### **3-3 Firewall**

#### **3-3-1 Access Control**

##### **3-3-1-1 Add PC**

#### **3-3-2 URL Blocking**

#### **3-3-3 DoS Attack Prevention**

##### **3-3-3-1 DoS - Advanced Settings**

#### **3-3-4 Demilitarized Zone (DMZ)**

### **3-4 System Status**

#### **3-4-1 System information and firmware version**

#### **3-4-2 Internet Connection Status**

#### **3-4-3 Device Status**

#### **3-4-4 System Log**

#### **3-4-5 Active DHCP client list**

#### **3-4-6 Statistics**

### **3-5 Configuration Backup and Restore**

### **3-6 Firmware Upgrade**

### **3-7 System Reset**



## **CHAPTER IV: APPENDIX**

4-1 Hardware Specification

4-2 Troubleshooting

4-3 Glossary

# Chapter I: Product Information

## 1-1 Introduction and safety information

Thank you for purchasing the HAWNR1 Wireless-150N Router with Range Amplifier! This highly efficient router is the best choice for **Small office / Home office** users, all computers and network devices can share a single xDSL / cable modem internet connection at high speed. Easy install procedures allow any computer users to setup a network environment in a very short time. When the number of your computers and network-enabled devices grow, you can also expand the number of network slots by simply attaching a hub or switch, to extend the scope of your network!

With built-in IEEE 802.11b/g/Draft-N wireless network capability, all computers and wireless-enabled network devices (*including PDA, cellular phone, game consoles, and more!*) can connect to this wireless router without additional cabling. ***New Draft-N wireless capability gives you the fastest speeds of wireless experience ever! With a compatible wireless card installed in your PC, you can transfer files at up to 300Mbps (transfer data rate)! The radio coverage is also doubled, so don't worry if your office or house is really big!***

*Other features of this router include:*

- High-Speed Internet Access throughput
- Allow multiple users to share a single Internet line
- Supports up to 253 users
- Share a single Cable or xDSL internet connection
- Access private LAN servers from the internet
- Four wired LAN ports (10/100M) and one WAN port (10/100M)
- Provides IEEE 802.11b/g/Draft-N wireless LAN capability
- Support DHCP (Server/Client) for easy IP-address setup
- Support multiple wireless modes like: AP, Station-Infrastructure, Wireless Bridge and Universal Repeater.

- Advanced network and security features like: Special Applications, QoS, DMZ, Virtual Servers, Access Control, Firewall.
- Allows you to monitor the router's status like: DHCP Client Log, System Log, Security Log and Device/Connection Status
- Easy to use Web-based GUI for network configuration and management purposes
- Remote management function allows configuration and upgrades from a remote computer (over the Internet)
- Auto MDI / MDI-X function for all wired Ethernet ports.

## 1-2 Safety Information

In order to keep the safety of users and your properties, please follow the following safety instructions:

1. This router is designed for indoor use only; DO NOT place this router outdoors.
2. DO NOT put this router at or near hot or humid places, like kitchens or bathrooms. Also, do not leave this router in the car in summer.
3. DO NOT pull any connected cable with force; disconnect them from the router first.
4. If you want to place this router in a high places or hang on the wall, please make sure the router is firmly secured. Falling from high places will damage the router and its accessories, and the warranty will be void.
5. Accessories of this router, like antennas and power supply, are a danger to small children under 3 years old. They may put the small parts in their nose or mouth and it could cause serious damage to them. **KEEP THIS ROUTER OUT OF THE REACH OF CHILDREN!**
6. The router will become hot when being used for long times (***This is normal and is not a malfunction***). DO NOT put this router on paper, cloth, or other flammable materials.
7. There are no user-serviceable parts inside the router. If you have found that the router is not working properly, please contact technical support or your dealer of purchase and ask for help. DO NOT disassemble the router, or warranty will be void.
8. If the router falls into water when it's powered on, DO NOT use your hand to pick it up. Switch the electrical power off before you do anything, or contact an experienced technician for help.
9. If you smell something strange, or even see some smoke coming out from

the router or power supply, remove the power supply or switch the electrical power off immediately, and call dealer of purchase for help.

## 1-3 System Requirements

- One computer (Mac or PC) with an available CD or DVD-ROM drive.
- Internet Web Browser (Internet Explorer, Safari, etc.)
- A Wired or Wireless networking adapter (e.g. Airport card, built-in Ethernet adapter, etc.)
- Broadband Modem (e.g. Cable or DSL)


## 1-4 Package Contents

Before you start to use this router, please check if there's anything missing in the package, and contact your dealer of purchase to claim for missing items:

<input type="checkbox"/> Broadband Router (main body, 1 pcs).....	1
<input type="checkbox"/> Quick Installation Guide (1 pcs) .....	2
<input type="checkbox"/> Setup CD-ROM (1pcs) .....	3
<input type="checkbox"/> A/C power adapter (1 pcs) .....	4
<input type="checkbox"/> 2dBi Dipole Antennas (2 pcs) .....	5

## 1-5 Product Overview

### Top Panel

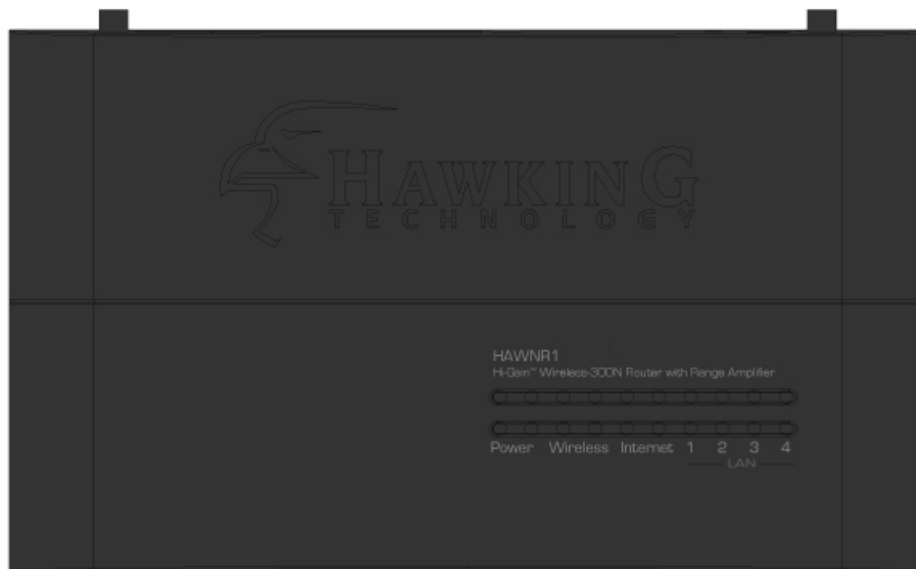

LED Name	Light Status	Description
PWR	ON	Router is switched on and correctly powered
Wireless	On	Wireless network is switched on or WPS mode is on.
	Off	Wireless network is switched off
	Flashing	Wireless LAN activity (transferring or receiving data).
Internet 10/100M	On	WAN port (Internet) is running at 100Mbps
	Off	WAN port (Internet) is running at 10Mbps
	Flashing	WAN activity (transferring or receiving data)
Internet LNK/ACT	On	WAN port is connected
	Off	WAN port is not connected
	Flashing	WAN activity (transferring or receiving data)
LAN 10/100M	On	LAN port is running at 100Mbps
	Off	LAN port is running at 10Mbps
LAN LNK/ACT	On	LAN port is connected
	Off	LAN port is not connected
	Flashing	LAN activity (transferring or receiving data)



## Back Panel

Antenna A

Antenna B



Item Name	Description
Antenna A to B	All are 3dBi dipole antennas.
Power	Power connector, connects to A/C power adapter.
Reset	Reset the router to factory default settings (clear all settings). Press this button and hold for 10 seconds to restore all settings to factory defaults.
LAN (1 – 4)	Local Area Network (LAN) ports 1 to 4.
MODEM	Wide Area Network (WAN / Internet) port.
Wireless On/Off	Switch the wireless radio on or off

## *Chapter II: System and Network Setup*

### **2-1 Build network connection**

Please follow the following instructions to build the network connection between your new WIRELESS router and your computers and other network devices:

1. Connect your xDSL /cable modem to the WAN port of router by Ethernet cable.
2. Connect all your computers and network devices (network-enabled consumer devices other than computers, like game console, or switch / hub) to the LAN port of the router.
3. Connect the A/C power adapter to the wall socket, and then connect it to the 'Power' socket of the router.
4. Please check all LEDs on the front panel. 'PWR' LED should be steadily on, WAN and LAN LEDs should be on if the computer / network device connected to the respective port of the router is powered on and correctly connected. If PWR LED is not on, or any LED you expected is not on, please recheck the cabling, or jump to '**4-2 Troubleshooting**' for possible reasons and solutions.

## **2-2 Connecting to wireless broadband router by web browser**

After the network connection is built, the next step you should do is setup the router with proper network parameters, so it can work properly in your network environment.


Before you can connect to the router and start configuration procedures, your computer must be able to get an IP address automatically (use dynamic IP address). If it's set to use static IP address, or you're unsure, please follow the following instructions to configure your computer to use dynamic IP address:

***If the operating system of your computer is....***


<b>Windows 95/98/Me</b>	<b>- please go to section 2-2-1</b>
<b>Windows 2000</b>	<b>- please go to section 2-2-2</b>
<b>Windows XP</b>	<b>- please go to section 2-2-3</b>
<b>Windows Vista</b>	<b>- please go to section 2-2-4</b>

## 2-2-1 Windows 95/98/Me IP Address setup:

1. Click 'Start' button (it should be located at lower-left corner of your computer), then click control panel. Double-click **Network** icon, and **Network** window will appear. Select 'TCP/IP', then click 'Properties'.

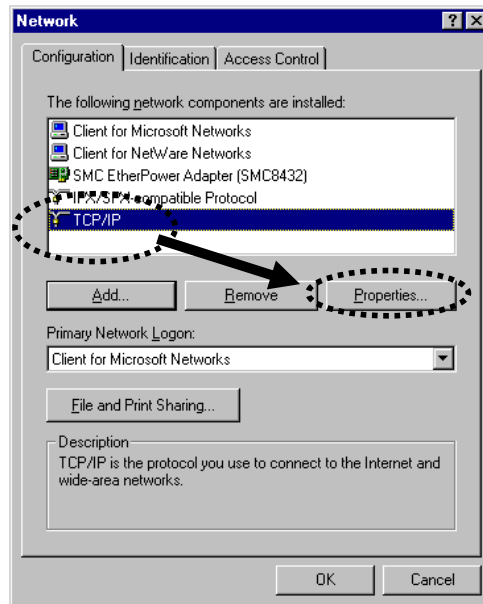


2. Select 'Obtain an IP address from a DHCP server' and then click 'OK'.

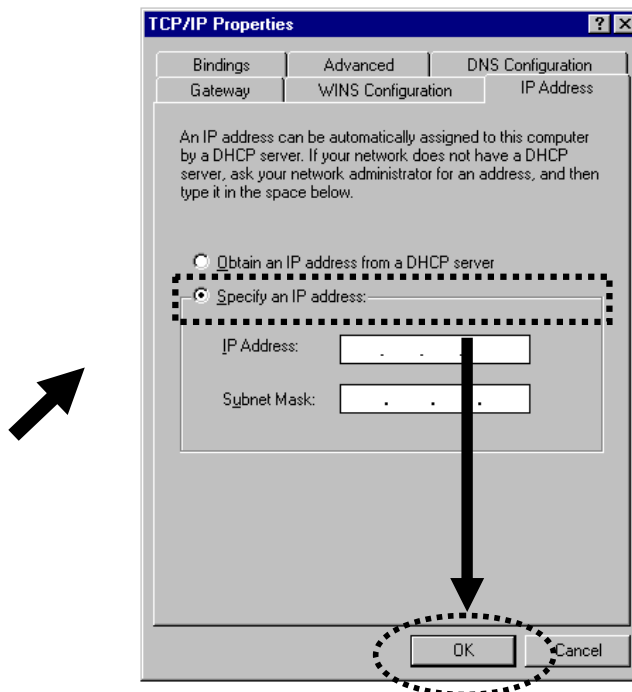


## 2-2-2 Windows 2000 IP address setup:

1. Click 'Start' button (it should be located at lower-left corner of your computer), then click control panel. Double-click **Network and Dial-up Connections** icon; click **Local Area Connection**, and **Local Area Connection Properties** window will appear. Select 'Internet Protocol (TCP/IP)' and then click 'Properties'

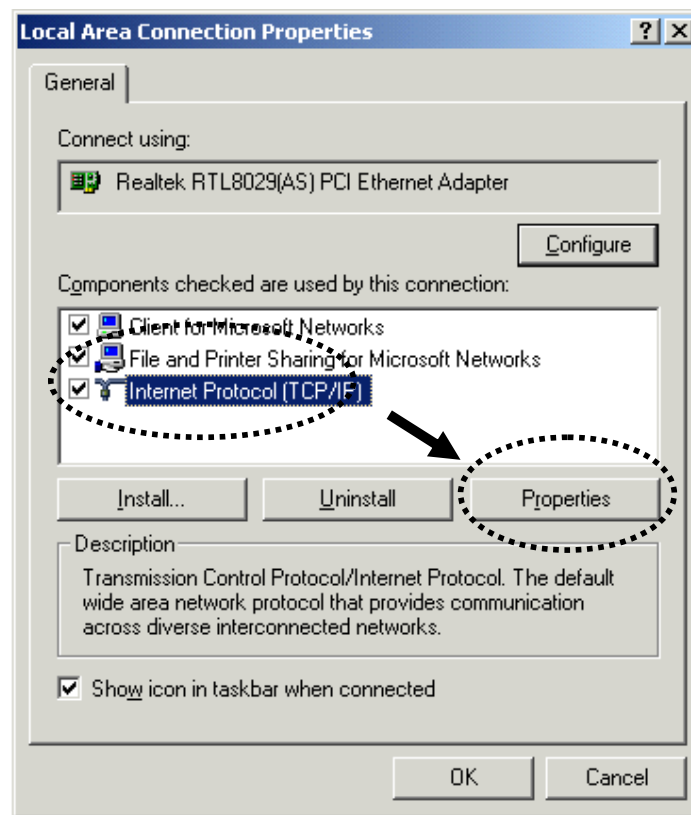


2. Select 'Obtain an IP address automatically' and 'Obtain DNS server address automatically', then click 'OK'.

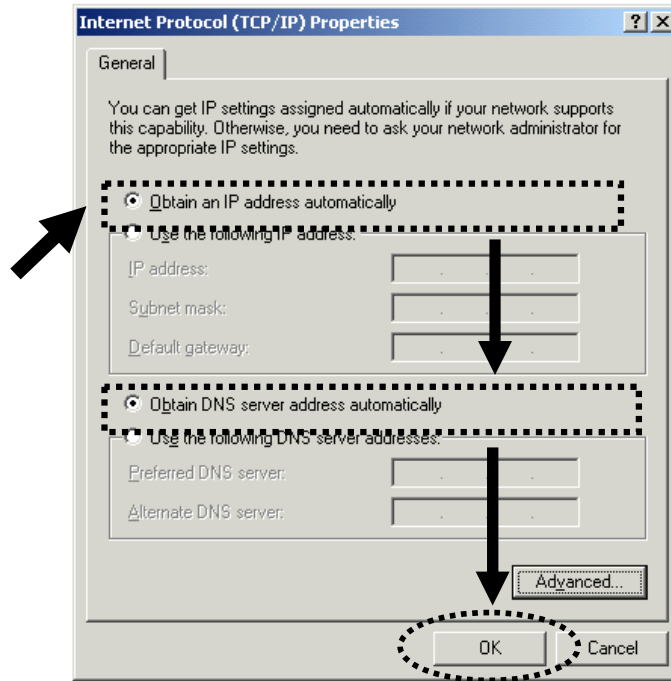


### 2-2-3 Windows XP IP address setup:

1. Click 'Start' button (it should be located at lower-left corner of your computer), then click control panel. Double-click **Network and Internet Connections** icon, click **Network Connections**, and then double-click **Local Area Connection, Local Area Connection Status** window will appear, and then click 'Properties'

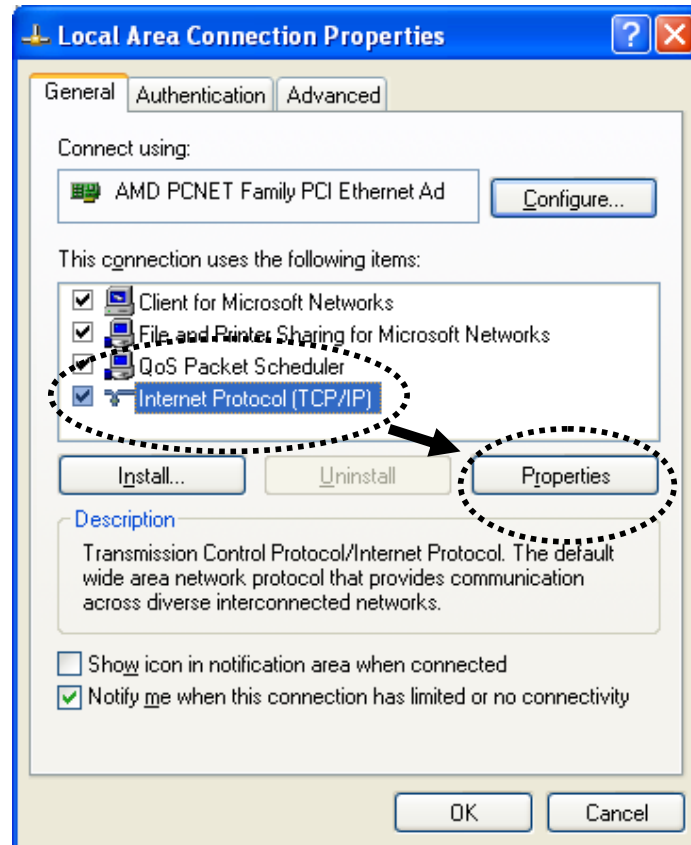


2. Select 'Obtain an IP address automatically' and 'Obtain DNS server address automatically', then click 'OK'.

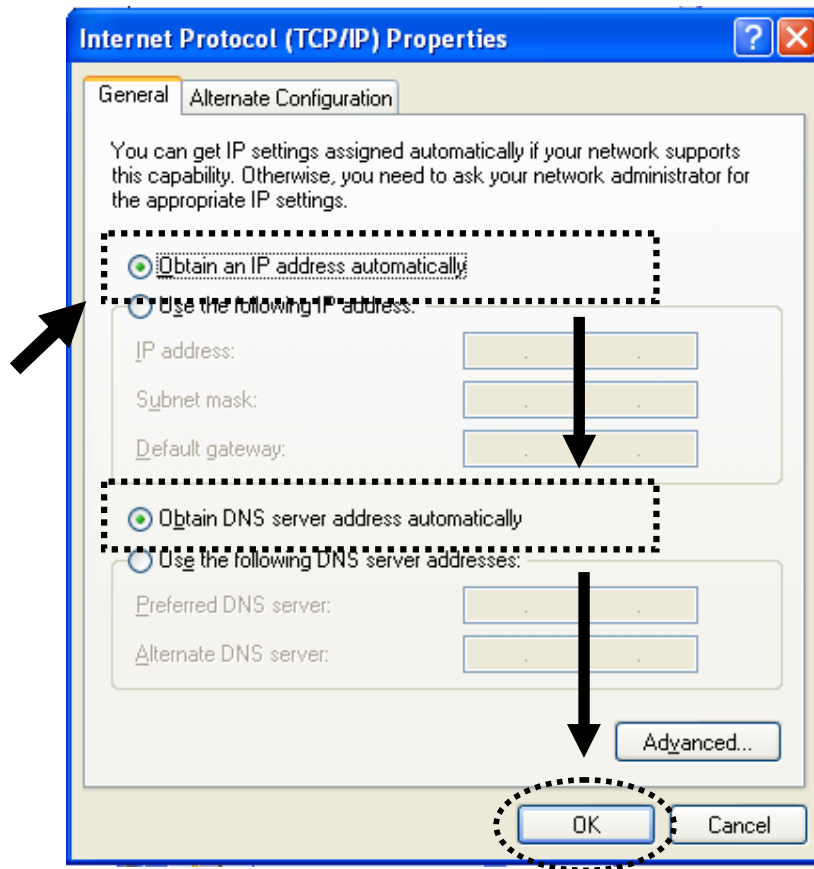




## 2-2-4 Windows Vista IP address setup:

1. Click 'Start' button (it should be located at lower-left corner of your computer), then click control panel. Click **View Network Status and Tasks**, and then click **Manage Network Connections**. Right-click **Local Area Network**, then select **'Properties'**. **Local Area Connection Properties** window will appear, select 'Internet Protocol Version 4 (TCP / IPv4)', and then click 'Properties'

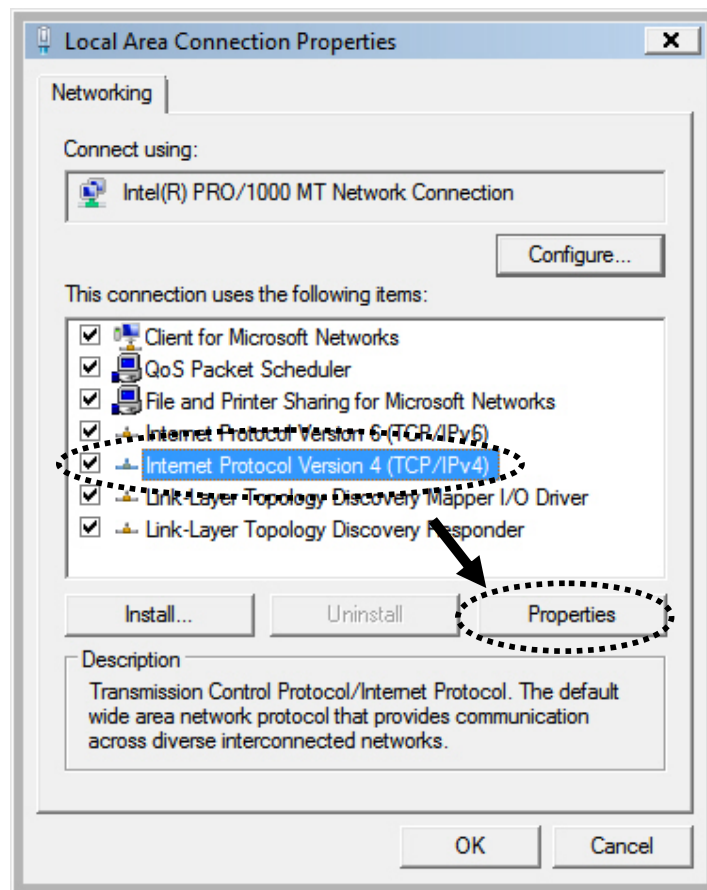

2. Select 'Obtain an IP address automatically' and 'Obtain DNS server address automatically', then click 'OK'.

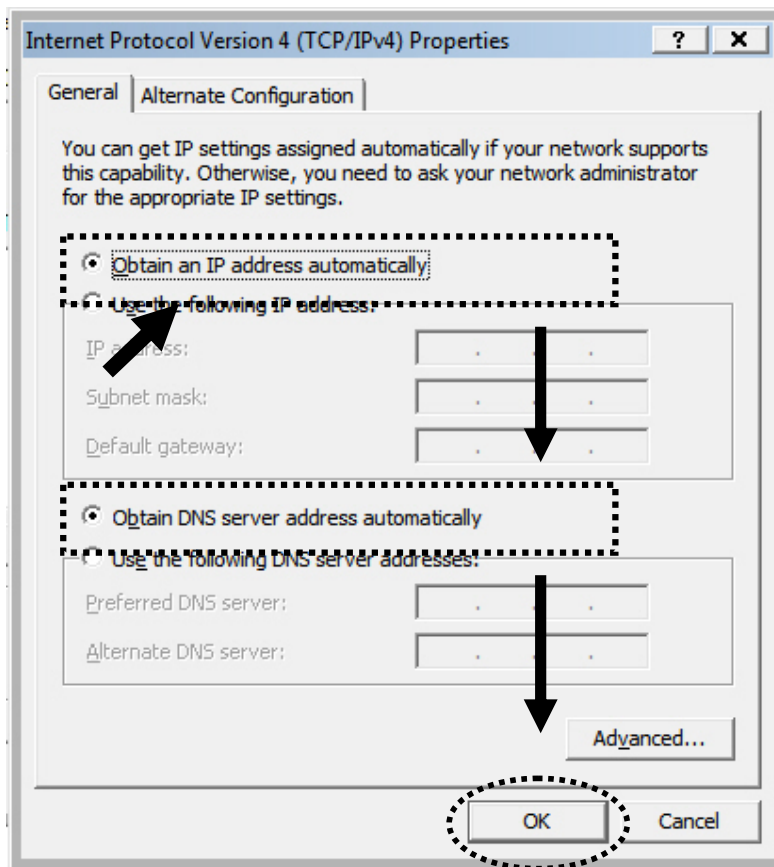


## 2-2-5 Router IP address lookup


After the IP address setup is complete, please click 'start' > 'run' at the bottom-lower corner of your desktop:



Input 'cmd', then click 'OK'

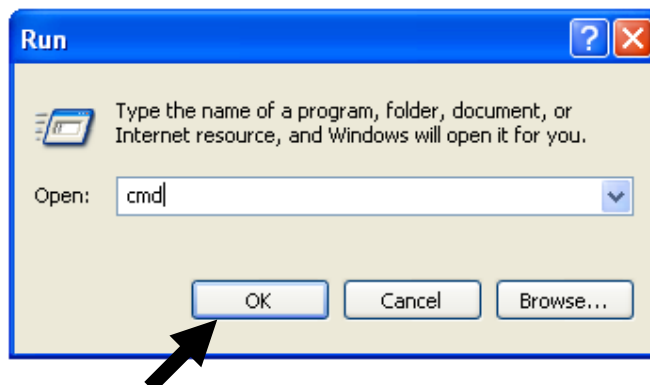


Input 'ipconfig', then press 'Enter' key. Please check the IP address followed by 'Default Gateway' (In this example, the IP address of router is 192.168.1.254, ***please note that this value may be different.***)

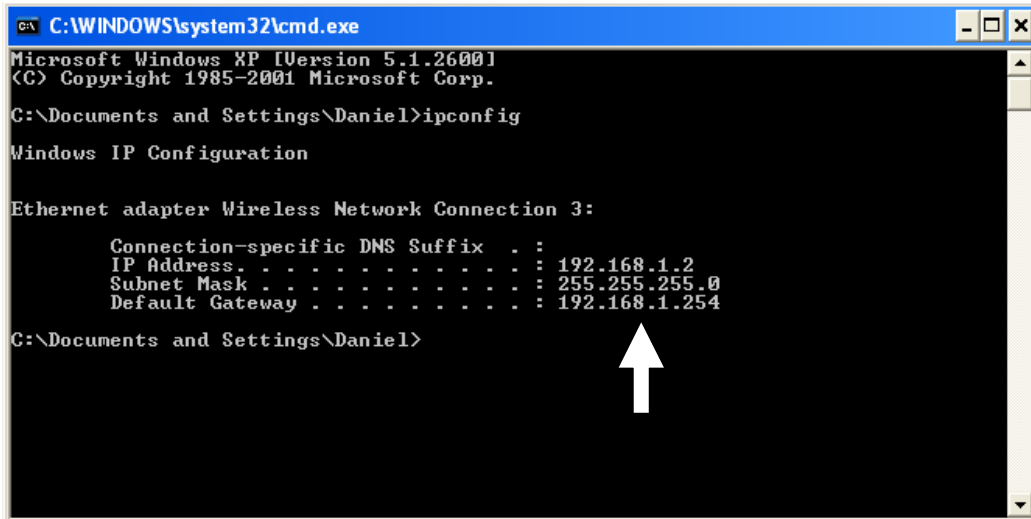


**NOTE:** If the IP address of Gateway is not displayed, or the address followed by 'IP Address' begins with '169', please recheck network connection between your computer and router, and / or go to the beginning of this chapter, to recheck every step of network setup procedure.

3. Connect the router's management interface by web browser

After your computer obtained an IP address from router, please start your web browser, and input the IP address of router in address bar. The following message should be shown:

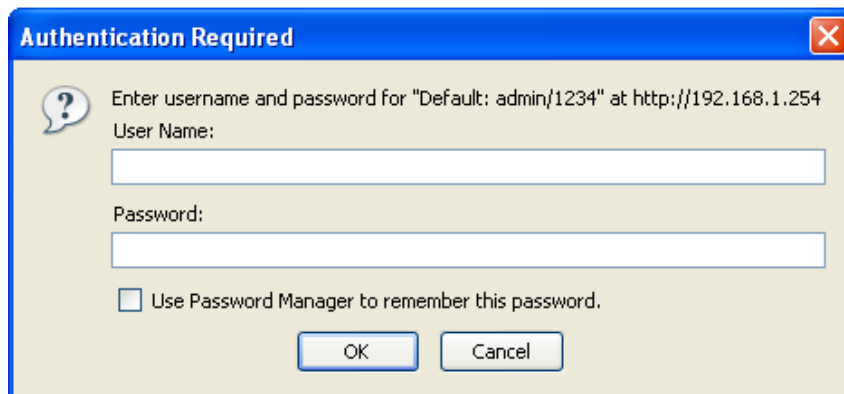

Please input user name and password in the field respectively, default user name is 'admin', and default password is '1234', then press 'OK' button, and you can see the web management interface of this router:

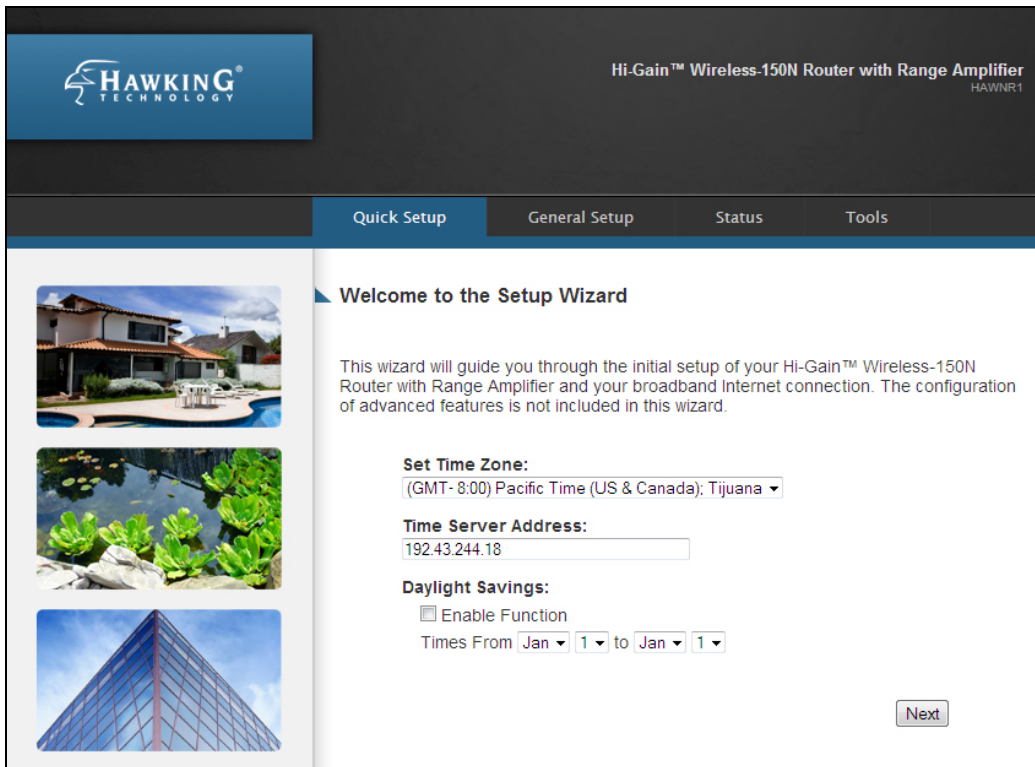


**NOTE:** If you can't see the web management interface, and you are being prompted to input user name and password again, it means you didn't input username and password correctly. Please retype user name and password again. If you are certain that user name and password you typed are correct, please go to '4-2 Troubleshooting' to perform a factory reset, to set the password back to default value.

**TIP:** This page shows the major setting categories: Setup, Wireless, Local Network, Security, Apps and Gaming, Admin, and Status. You can find the shortcut which leads to these setting categories at the top of every page, and you can jump to another category directly by clicking the link.

## 2-3 Using 'Quick Setup'

This router provides a 'Quick Setup' procedure, which will help you to complete all required settings you need to access the Internet in very short time. Please follow the following instructions to complete the 'Quick Setup':

Please go to Quick Setup Wizard menu by clicking 'Quick Setup' button.

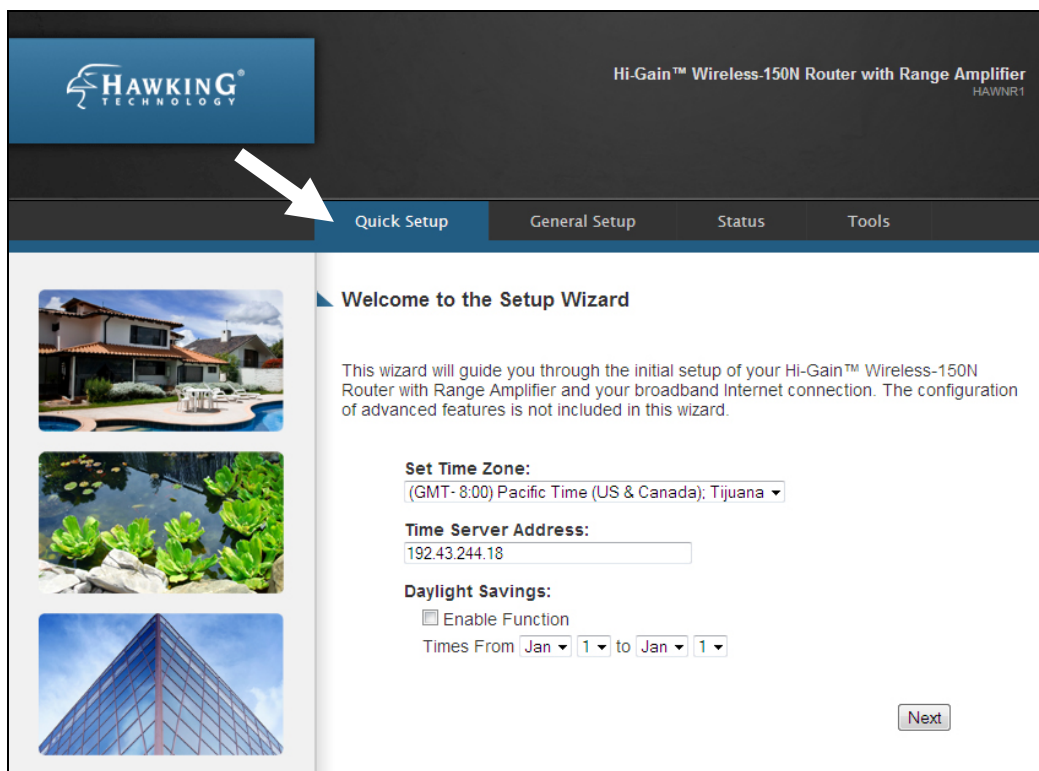

**HAWKING TECHNOLOGY** Hi-Gain™ Wireless-150N Router with Range Amplifier HAWNR1

Quick Setup General Setup Status Tools

**Welcome to the Setup Wizard**

This wizard will guide you through the initial setup of your Hi-Gain™ Wireless-150N Router with Range Amplifier and your broadband Internet connection. The configuration of advanced features is not included in this wizard.

**Set Time Zone:**  
(GMT- 8:00) Pacific Time (US & Canada); Tijuana ▾

**Time Server Address:**  
192.43.244.18

**Daylight Savings:**  
 Enable Function  
Times From Jan ▾ 1 ▾ to Jan ▾ 1 ▾

Next

And the following message will be displayed:

### 1. Set Time Zone

**Welcome to the Setup Wizard**

This wizard will guide you through the initial setup of your Hi-Gain™ Wireless-150N Router with Range Amplifier and your broadband Internet connection. The configuration of advanced features is not included in this wizard.

**Set Time Zone:**  
(GMT- 8:00) Pacific Time (US & Canada); Tijuana ▾ 1

**Time Server Address:**  
192.43.244.18 2

**Daylight Savings:**  
 Enable Function  
Times From Jan ▾ 1 ▾ to Jan ▾ 1 ▾ 3

4

Here are descriptions of every setup items:

---

<i>Set Time Zone (1):</i>	<i>Please press ▾ button, a drop-down list will be shown, and you can choose a time zone of the location you live.</i>
<i>Time Server Address (2):</i>	<i>Input the IP address / host name of time server here.</i>
<i>Daylight Savings(3):</i>	<i>If the country you live uses daylight saving, please check 'Enable Function' box, and choose the duration of daylight saving.</i>

---

After you finish with all settings, please click 'Next' (4) button.

**NOTE: There are several time servers available on internet:**  
129.6.15.28 (time-a.nist.gov)  
132.163.4.101 (time-a.timefreq.bldrdoc.gov)  
131.107.1.10 (time-nw.nist.gov)

**If you found that the time of router is incorrect, try another time server.**

## 2. Broadband Type

**Welcome to the Setup Wizard**

Select the type of broadband Internet connection that you are currently configuring:

- Cable Modem Setup (Dynamic IP)**  
For Internet connections using coaxial cables (TV cables). Typically used with Cable modem setups.
- DSL and Cable Modem Setup (Static IP)**  
DSL Internet service providers frequently use a Fixed IP Address for your Broadband connection. If you have been provided with this information, choose this option and enter the assigned IP Address, Subnet Mask, Gateway IP Address and DNS IP Address in the next step. [This step is not limited to DSL setups and may be used for any static IP configuration.](#)
- DSL (PPPoE)**  
If you connect to the Internet using a DSL Modem and your ISP has provided you with a Password and a Service Name, then your ISP uses PPPoE to establish a connection. You must choose this option and enter the required information.
- DSL (PPTP)**  
If you connect to the Internet using a DSL Modem and your ISP has provided you with a Password, Local IP Address, Remote IP Address and a Connection ID, then your ISP uses PPTP to establish a connection. You must choose this option and enter the required information.
- DSL (L2TP)**  
Layer Two Tunneling Protocol DSL connections.

Please choose the broadband (Internet connection) type you're using and then click 'Next'. There are six types of Internet connection, they are:

- |                                       |                              |
|---------------------------------------|------------------------------|
| Cable Modem Setup (Dynamic IP)        | - Please go to section 2-3-1 |
| DSL and Cable Modem Setup (Static IP) | - Please go to section 2-3-2 |
| DSL (PPPoE)                           | - Please go to section 2-3-3 |
| DSL (PPTP)                            | - Please go to section 2-3-4 |
| DSL (L2TP)                            | - Please go to section 2-3-5 |



If you're not sure, please contact your Internet Service Provider (ISP). A wrong Internet connection type will cause connection problems, and you will not be able to connect to internet.

If you want to go back to previous step, please press 'Back' button on the bottom of this page.

**NOTE: Some service providers use 'DHCP' (Dynamic Host Configuration Protocol) to assign IP address to you. In this case, you can choose 'Cable Modem' as Internet connection type, even if you're using another connection type, like xDSL. Also, some cable modem uses PPPoE, so you can choose 'PPPoE xDSL' for such cable modem connections, even if you're using a cable modem.**

### **2-3-1 Setup procedure for 'Cable Modem Setup (Dynamic IP)':**

**Cable Modem Setup (Dynamic IP)**

If required by your Internet Service Provider, you can enter the Host Name and Mac Address of your registered network device here. If you do not know or do not have a Host Name and Mac Address, simply click 'Continue' to proceed.

Host Name:  1

MAC Address:  2

3

4

Here are descriptions of every setup items:

---

*Host Name (1): Please input the host name of your computer, this is optional, and only required if your service provider asks you to do so.*

*MAC address (2): Please input MAC address of your computer here, if your service provider only permits computer with certain MAC address to access internet.*

*Clone Mac Address (3): If you're using the computer which used to connect to Internet via cable modem, you can simply press 'Clone Mac address' button to fill the MAC address field with the MAC address of your computer.*

---

After you finish with all settings, please click 'Continue' (4) button; if you want to go back to previous menu, click 'Back'.

### **2-3-2 Setup procedure for 'DSL and Cable Modem Setup (Static IP Address)':**

**DSL and Cable Modem Setup (Static IP Address)**

Enter the assigned IP Address, Subnet Mask, DNS Address and the Gateway IP Address provided by your Internet Service Provider here. Click "Continue" to proceed.

IP Address:  1

Subnet Mask:  2

Default Gateway:  3

DNS Address:  4

5

Here are descriptions of every setup items:

---

*IP address assigned by your Service Provider (1): Please input IP address assigned by your service provider.*

*Subnet Mask (2): Please input subnet mask assigned by your service provider*

*DNS address (3): Please input the IP address of DNS server provided by your service provider.*

*Service Provider IP Address (4): Please input the IP address of DNS server provided by your service provider.*

---

**You must use the addresses provided by your Internet service provider, wrong value settings will cause connection problems.**

When you finish with all settings, press 'Continue' (5); if you want to go back to previous menu, click 'Back'.

**NOTE: You can choose this Internet connection method if your service provider assigns a fixed IP address (also known as a static address) to you, and not using DHCP or PPPoE protocol. Please contact your service provider for further information.**

### 2-3-3 Setup procedure for 'DSL (PPPoE)':

#### Point-to-Point Protocol over Ethernet (PPPoE)

Enter the Point-to-Point Protocol over Ethernet (PPPoE) User Name and Password assigned by your Service Provider. The Service Name is normally optional, but may be required by some Service Providers. Enter a Idle Time (in minutes) to define a maximum period of time for which the Internet connection is maintained during inactivity. If the connection is inactive for longer than the Maximum Idle Time, then the connection will be dropped. You can enable the Connect on Demand option to automatically re-establish the connection as soon as you attempt to access the Internet again. If your Internet Service Provider requires the use of PPPoE, enter the information below.

User Name:  1

Password:  2

Service Name:  3

MTU:  (512<=MTU<=1492) 4

Connection Type:    5

Idle Time Out:  (1-1000 Minute) 6

7

Here are descriptions of every setup items:

- 
- User Name (1): Please input user name assigned by your Internet service provider here.*
- Password (2): Please input the password assigned by your Internet service provider here.*
- Service Name (3): Please give a name to this Internet service, this is optional*
- MTU (4): Please input the MTU value of your network connection here. If you don't know, you can use default value.*

*Connection Type (5): Please select the connection type of Internet connection you wish to use (detailed explanation listed below).*

*Idle Time Out (6): Please input idle time out, (detailed explanation listed below).*

---

When you finish with all settings, please click 'Continue' (7); if you want to go back to previous menu, click 'Back'.


**MTU - Please use default value if you don't know what it is, or ask your service provider for a proper value.**

**Connection Type - There are 3 options: 'Continuous' - keep internet connection alive, do not disconnect, connect on Demand - only connects to Internet when there's a connect attempt, and 'Manual' - only connects to Internet when 'Connect' button on this page is pressed, and disconnects when 'Disconnect' button is pressed.**

**Idle Time Out: Specify the time to shutdown internet connect after no internet activity is detected by minute. This option is only available when connection type is 'Connect on Demand'.**

### 2-3-4 Setup procedure for 'DSL (PPTP)':

DSL (PPTP) requires two kinds of setting: WAN interface setting (setup IP address) and PPTP setting (PPTP user name and password). Here we start from WAN interface setting:

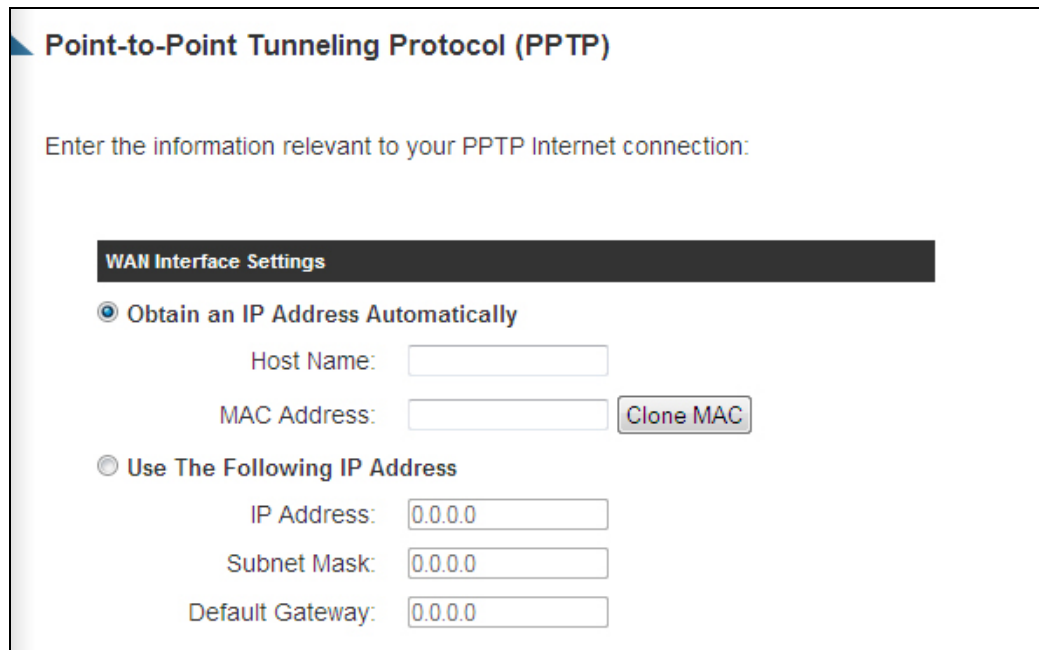

The screenshot shows a configuration window titled "Point-to-Point Tunneling Protocol (PPTP)". Below the title, it says "Enter the information relevant to your PPTP Internet connection:". A dark grey header bar contains the text "WAN Interface Settings". There are two radio button options: "Obtain an IP Address Automatically" (which is selected) and "Use The Following IP Address". Under the first option, there are input fields for "Host Name:" and "MAC Address:", with a "Clone MAC" button next to the MAC field. Under the second option, there are input fields for "IP Address:", "Subnet Mask:", and "Default Gateway:", each containing the value "0.0.0.0".

Select how you obtain IP address from your service provider here. You can choose 'Obtain an IP Address Automatically' (equal to DHCP, please refer to 'Cable Modem' section above), or 'Use the following IP address' (i.e. static IP Address).

WAN interface settings must be correctly set, or the Internet connection will fail even if those settings of PPTP settings are correct. Please contact your Internet Service Provider if you don't know what you should fill in these fields.

Now please go to PPTP settings section:

**PPTP Settings**

User Name:  1

Password:  2

PPTP Gateway:  3

Connection ID:  (Optional) 4

MTU:  (512<=MTU<=1492) 5

BEZEQ-ISRAEL:  Enable (For BEZEQ network in ISRAEL use only) 6

Connection Type:  7

Idle Time Out:  (1-1000 Minute) 8

9

**Here are descriptions of every setup item:**

- 
- User ID (1): Please input user ID (user name) assigned by your Internet service provider here.*
- Password (2): Please input the password assigned by your Internet service provider here.*
- PPTP Gateway (3): Please input the IP address of PPTP gateway assigned by your Internet service provider here.*
- Connection you ID (4): Please input the connection ID here, this is optional and can leave it blank.*
- MTU (5): Please input the MTU value of your network connection here. If you don't know, you can use default value.*
- BEZEQ-ISRAEL (6): Enable this setting if you live in Israel. \**
- Connection type (7): Please select the connection type of Internet connection you wish to use, please refer to last section for detailed descriptions.*

*Idle Time Out (8): Please input the idle time out of Internet connection you wish to use, and refer to last section for detailed descriptions.*

---


\* Setting item 'BEZEQ-ISRAEL' is only required to check if you're using the service provided by BEZEQ network in Israel.

When you finish with all settings, please click 'Continue' (9); if you want to go back to previous menu, click 'Back'.



## 2-4 Basic Setup

In this chapter, you'll know how to change the time zone, password, and remote management settings. Please start your web browser and log onto router web management interface, then click 'General Setup' tab.

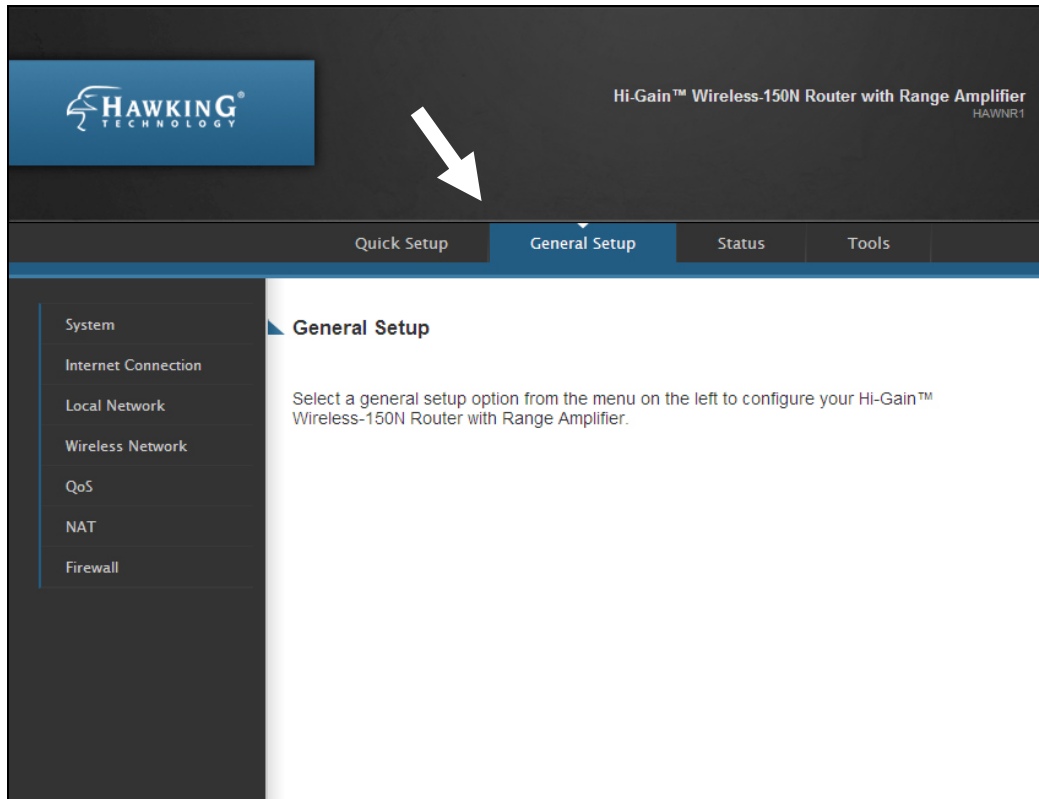


### 2-4-1 Time zone and time auto-synchronization

Please follow the following instructions to set time zone and time auto-synchronization parameters:

Please click 'General Setup' tab at the top of web management interface, select 'System' tab at the left, and select 'Time Zone' tab. The time zone settings will be displayed in your web browser: Please select the correct time zone from the drop-down list, and input the IP address or host name of the time server. If you want to enable daylight savings setting, please check 'Enable Function' box,

and set the duration of daylight setting.

After you finish with all settings, please click 'Apply' button and the following message will be displayed on your web browser:

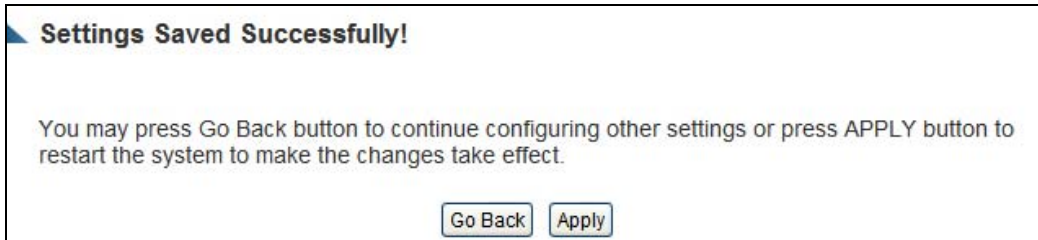

Please click 'Go Back' to go back to previous setup menu, or click 'Apply' to reboot the router so the settings will take effect. Please wait for about 30 seconds while router is rebooting.

**NOTE: You can refer to the instructions given in the last chapter: 'Using Quick Setup', for detailed descriptions on time zone settings.**

### ***2-4-2 Change management password***

Default password of this router is '1234', and it's displayed on the login prompt when accessed from the web browser. There's a security risk if you don't change the default password, since everyone can see it. This is very important when you have wireless function enabled.

To change password, please follow the instructions:

Please click 'General Setup' tab at top of web management interface, select 'System' tab in the menu at the left, and then click 'Password Settings', and the following message will be displayed on your web browser:

**Password Settings**

You can change the password required while logging into the Hi-Gain™ Wireless-150N Router with Range Amplifier's web-based management system. By default, the password is 1234. So please assign a password to the Administrator as soon as possible, and store it in a safe place. Passwords can contain 0 to 30 alphanumeric characters, and are case sensitive.

Current Password:  1

New Password:  2

Confirm Password:  3

**Here are descriptions of every setup item:**

---

*Current*                      *Please input current password here.*

*Password (1):*


*New Password (2):*      *Please input new password here.*

*Confirm*                      *Please input new password here again.*

*Password (3):*


---

If the password you typed in 'New Password' (2) and 'Confirm Password' (3) field are not the same, you'll see the following message:

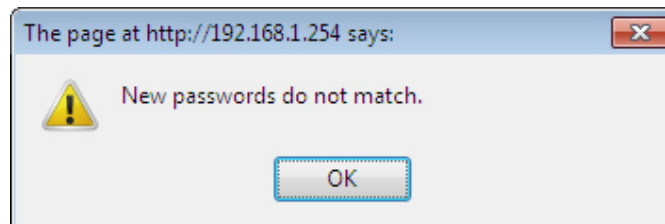

Please retype the new password again when you see above message.

If you see the following message:

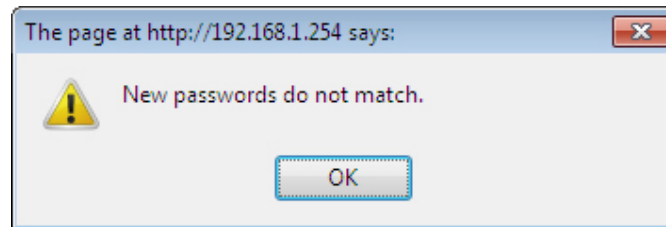

It means the content in 'Current Password' field is wrong, please click 'OK' to go back to previous menu, and try to input current password again.

If the current and new passwords are correctly entered, after you click 'Apply', you'll be prompted to input your new password:



Please use new password to enter web management interface again, and you should be able to login with new password.

### 2-4-3 Remote Management

This router does not allow management access from Internet, to prevent possible security risks (especially when you defined a weak password, or didn't change default password). However, you can still manage this router from a specific IP address by enabling the 'Remote Management' Function.

Please click 'General Setup' tab at top of web management interface, then click 'Remote Management', and the following message will be displayed on your web browser:

Host Address	Port	Enable
0.0.0.0	8080	<input type="checkbox"/>

1 2 3

Apply 4

Here are descriptions of every setup item:

---

*Host Address (1): Input the IP address of the remote host you wish to initiate a management access.*

*Port (2): You can define the port number this router should expect an incoming request. If you're providing a web service (default port number is 80), you should try to use other port number. You can use the default port setting '8080', or something like '32245' or '1429'. (Any integer between 1 and 65534)*

*Enabled (3): Select the field to start the configuration.*

---

After you finish with all settings, please click 'Apply' (4) button and the following message will be displayed on your web browser:

**Settings Saved Successfully!**

You may press Go Back button to continue configuring other settings or press APPLY button to restart the system to make the changes take effect.

Please click 'Go Back' to go back to previous setup menu, or click 'Apply' to reboot the router so the settings will take effect. Please wait for about 30 seconds while router is rebooting.

**NOTE:** When you want to manage this router from another computer over the internet, you have to input the IP address and port number of this router. If your Internet service provider assigns you with a static IP address, it will not be a problem; but if the IP address your service provider assigns to you will vary every time you establish an internet connection, this will be a problem.

Please either ask your service provider to give you a static IP address, or use dynamic IP to host name mapping services like DDNS. Please refer to chapter 2-5-8 'DDNS client' for details.

**NOTE:** Default port number the web browser will use is '80'. If the 'Port' setting in this page is not '80', you have to assign the port number in the address bar of web browser manually. For example, if the IP address of this router is 1.2.3.4, and the port number you set is 8888, you have to input following address in the address bar of web browser:

**http://1.2.3.4:8888**


## 2-5 Setup Internet Connection (Setup)

Internet connection setup can also be done by using 'Quick Setup' menu described in Chapter 2-3.

To start configuration, please follow the instructions:

Please click 'General Setup' tab at the top of the web management interface, and on the left menu, click 'Internet Connection'. The following message will be displayed on your web browser:

Please select an Internet connection method depending on the type of connection you're using.

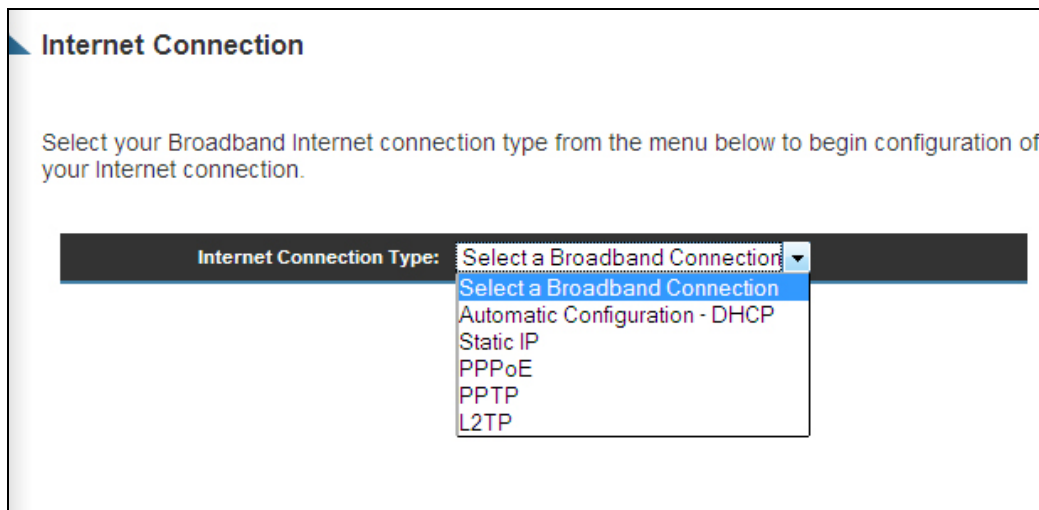

The screenshot shows a web interface titled "Internet Connection". Below the title, there is a text instruction: "Select your Broadband Internet connection type from the menu below to begin configuration of your Internet connection." Below this instruction is a dark grey horizontal bar with the text "Internet Connection Type:" followed by a dropdown menu. The dropdown menu is open, showing the following options: "Select a Broadband Connection" (highlighted in blue), "Automatic Configuration - DHCP", "Static IP", "PPPoE", "PPTP", and "L2TP".

- |                                |                              |
|--------------------------------|------------------------------|
| Automatic Configuration (DHCP) | - Please go to section 2-5-1 |
| Static IP                      | - Please go to section 2-5-2 |
| PPPoE                          | - Please go to section 2-5-3 |
| PPTP                           | - Please go to section 2-5-4 |
| L2TP                           | - Please go to section 2-5-5 |



## 2-5-1 Setup procedure for 'Cable Modem Setup (Dynamic IP)':

**Internet Connection**

Internet Connection Type: Automatic Configuration - DHCP

**Automatic Settings**

Host Name:  1

MAC Address:  2  3

Here are descriptions of every setup items:

---

*Host Name (1): Please input host name of your computer, this is optional, and only required if your service provider asks you to do so.*

*MAC Address (2): Please input MAC address of your computer, if your service provider only permits computer with certain MAC address to access internet.*

*Clone MAC Address (3): If you're using the computer which used to connect to Internet via cable modem, you can simply press 'Clone MAC Address' button to fill the MAC address field with the MAC address of your computer*

---

After you finish with all settings, please click 'Apply' (4) button and the following message will be displayed on your web browser:

**Settings Saved Successfully!**

You may press Go Back button to continue configuring other settings or press APPLY button to restart the system to make the changes take effect.

Please click 'Go Back' to go back to previous setup menu, or click 'Apply' to reboot the router so the settings will take effect. Please wait for about 30 seconds while router is rebooting.

### 2-5-2 Setup procedure for 'DSL Modem (Static IP)':

The screenshot shows a web interface for configuring an Internet Connection. At the top, the title is "Internet Connection". Below it, a dropdown menu is set to "Internet Connection Type: Static IP". To the left, there is a dark box labeled "Static IP Settings". To the right, there are three input fields: "IP Address: 10.1.1.93" with a "1" next to it, "Subnet Mask: 255.255.255.0" with a "2" next to it, and "Default Gateway: 10.1.1.1" with a "3" next to it. At the bottom right, there is a "4" next to an "Apply" button and a "Cancel" button.

Here are descriptions of every setup items:

---

<i>IP address assigned by your Service Provider (1):</i>	<i>Please input IP address assigned by your service provider.</i>
<i>Subnet Mask (2):</i>	<i>Please input subnet mask assigned by your service provider</i>
<i>Service Provider Gateway Address (3):</i>	<i>Please input the IP address of DNS server provided by your service provider.</i>

---

After you finish with all settings, please click 'Apply' (4) button and the following message will be displayed on your web browser:

**Settings Saved Successfully!**

You may press Go Back button to continue configuring other settings or press APPLY button to restart the system to make the changes take effect.

Please click 'Go Back' to go back to previous setup menu, or click 'Apply' to reboot the router so the settings will take effect. Please wait for about 30 seconds while router is rebooting.

### 2-5-3 Setup procedure for 'DSL (PPPoE)':

Internet Connection

Internet Connection Type: PPPoE

PPPoE Settings

User Name:  1

Password:  2

Service Name:  3

MTU:  (512<=MTU<=1492) 4

Connection Type:   5

Idle Time Out:  (1-1000 Minute) 6

7

*User Name (1): Please input user name assigned by your Internet service provider here.*

*Password (2): Please input the password assigned by your Internet service provider here.*

*Service Name (3): Please give a name to this Internet service, this is optional*

*MTU (4): Please input the MTU value of your network connection here. If you don't know, you can use default value.*

*Connection Type (5): Please select the connection type of Internet connection you wish to use.*  
*Continuous – The connection will be kept always on. If the connection is interrupted, the router will re-connect automatically.*

*Connect On-Demand – Only connect when you want to surf the Internet. "Idle Time Out" is set to stop the connection when the network traffic is not sending or*


receiving after an idle time.

*Manual – After you have selected this option, you will see the “Connect” button and “Disconnect” button, click “Connect” and the router will connect to the ISP. If you want to stop the connection, please click “Disconnect” button.*

*Idle Time Out (6): If you have selected the connection type to “Connect-On-Demand”, please input the idle time out.*

---


After you finish with all settings, please click ‘Apply’ (7) button and the following message will be displayed on your web browser:

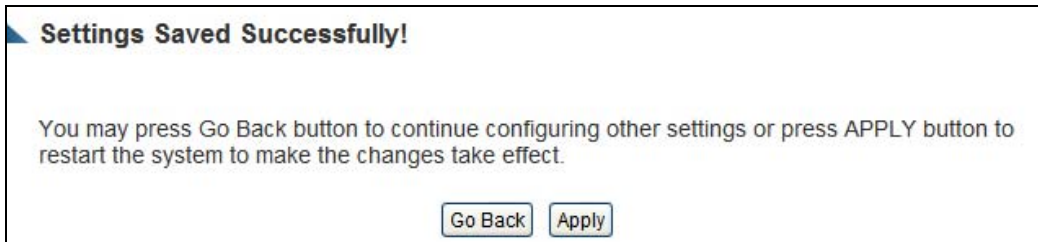

Please click ‘Go Back’ to go back to previous setup menu, or click ‘Apply’ to reboot the router so the settings will take effect. Please wait for about 30 seconds while router is rebooting.

#### **2-5-4 Setup procedure for 'PPTP':**

PPTP requires two kinds of setting: WAN interface setting (setup IP address) and PPTP setting (PPTP user name and password). Here we start from WAN interface setting:

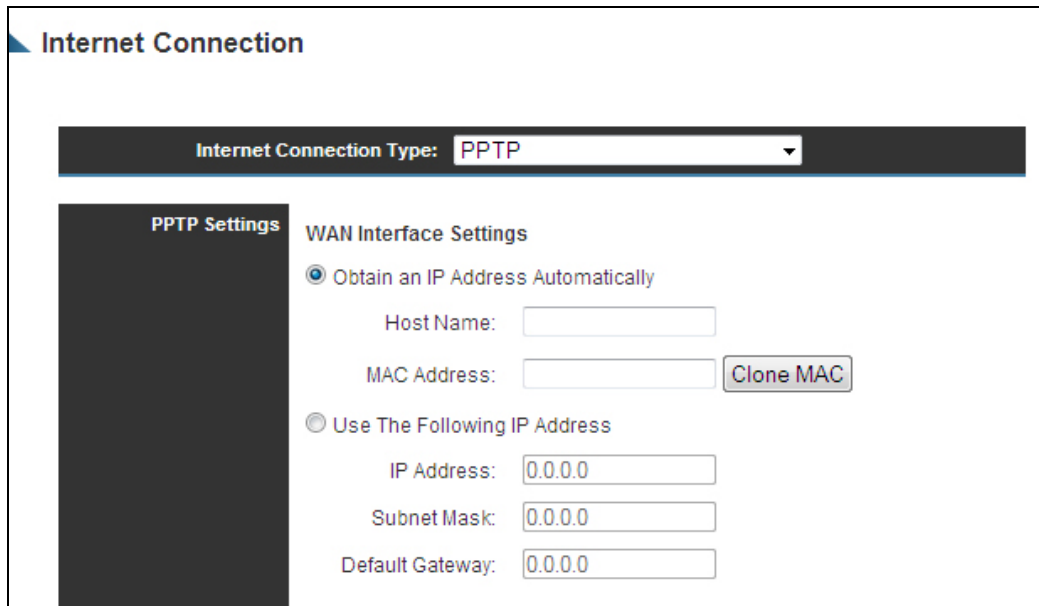

The screenshot shows the 'Internet Connection' configuration window. At the top, 'Internet Connection Type' is set to 'PPTP'. Below this, there are two main sections: 'PPTP Settings' (partially obscured by a dark sidebar) and 'WAN Interface Settings'. Under 'WAN Interface Settings', there are two radio button options: 'Obtain an IP Address Automatically' (which is selected) and 'Use The Following IP Address'. The 'Obtain an IP Address Automatically' option includes fields for 'Host Name', 'MAC Address' (with a 'Clone MAC' button), and 'Use The Following IP Address' (which includes fields for 'IP Address', 'Subnet Mask', and 'Default Gateway'). All IP-related fields are currently set to '0.0.0.0'.

Select the type of how you obtain IP address from your service provider here. You can choose 'Obtain an IP Address automatically' (equal to DHCP, please refer to 'Cable Modem' section above), or 'Use the following IP Address' (i.e. static IP address)

WAN interface settings must be correctly set, or the Internet connection will fail even if settings of PPTP settings are correct. Please contact your Internet service provider if you don't know what you should fill in these fields.

Now please go to PPTP settings section:

The screenshot shows a 'PPTP Settings' window with the following fields and controls:

- 1: User Name: [text input]
- 2: Password: [text input]
- 3: PPTP Gateway: [text input, value: 0.0.0.0]
- 4: Connection ID: [text input] (Optional)
- 5: MTU: [text input] (512<=MTU<=1492)
- 6: BEZEQ-ISRAEL:  Enable (For BEZEQ network in ISRAEL use only)
- 7: Connection Type: [dropdown menu, value: Continuous]
- Buttons: [Connect] [Disconnect]
- 8: Idle Time Out: [text input, value: 10] (1-1000 Minute)
- 9: [Apply] [Cancel]

Here are descriptions of every setup items:

- 
- User Name (1):** Please input user ID (user name) assigned by your Internet service provider here.
- Password (2):** Please input the password assigned by your Internet service provider here.
- PPTP Gateway (3):** Please input the IP address of PPTP gateway assigned by your Internet service provider here.
- Connection ID (4):** Please input the connection ID here, this is optional and you can leave it blank.
- MTU (5):** Please input the MTU value of your network connection here. If you don't know, you can use default value.

*BEZEQ-ISRAEL (6): If you are connecting to the BEZEQ network in Israel.  
Please enable this function.*

*Connection Type (7): Please select the connection type of Internet  
connection you wish to use, please refer to section  
2-5-3 for detailed descriptions.*

*Idle Time Out (8): Please input the idle time out of Internet connection you  
wish to use, and refer to section 2-5-3 for detailed  
descriptions.*

---


Setting item 'BEZEQ-ISRAEL' is only required to check if you're using the service provided by BEZEQ network in Israel.

When you finish with all settings, please click 'Apply' (9); if you want to go back to previous menu, click 'Cancel'.



### **2-5-5 Setup procedure for 'L2TP':**

L2TP requires two kinds of setting: WAN interface setting (setup IP address) and L2TP setting (L2TP user name and password). Here we start from WAN interface setting:

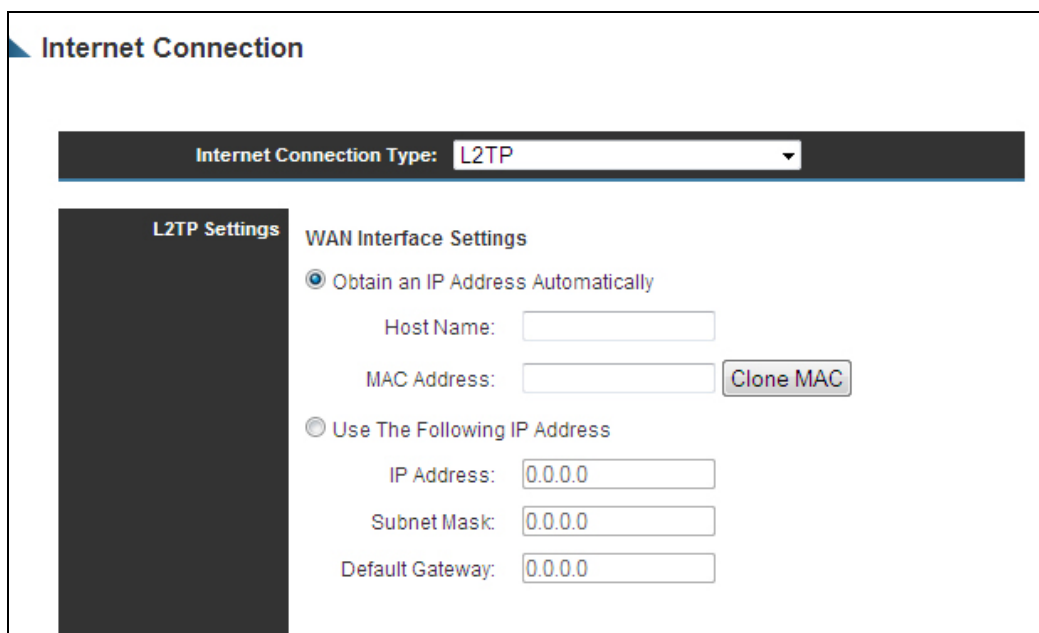

The screenshot shows the 'Internet Connection' configuration page. At the top, 'Internet Connection Type' is set to 'L2TP'. Below this, there are two main sections: 'L2TP Settings' (partially obscured by a dark bar) and 'WAN Interface Settings'. Under 'WAN Interface Settings', there are two radio button options: 'Obtain an IP Address Automatically' (which is selected) and 'Use The Following IP Address'. The 'Obtain an IP Address Automatically' option includes fields for 'Host Name', 'MAC Address', and a 'Clone MAC' button. The 'Use The Following IP Address' option includes fields for 'IP Address', 'Subnet Mask', and 'Default Gateway', all of which are currently set to '0.0.0.0'.

Select the type of how you obtain IP address from your service provider here. You can choose 'Obtain an IP Address automatically' (equal to DHCP, please refer to 'Cable Modem' section above), or 'Use the following IP Address' (i.e. static IP address)

WAN interface settings must be correctly set, or the Internet connection will fail even if settings of PPTP settings are correct. Please contact your Internet service provider if you don't know what you should fill in these fields.

Now please go to L2TP settings section:

L2TP Settings

User Name:  1

Password:  2

L2TP Gateway:  3

MTU:  (512<=MTU<=1492) 4

Connection Type:  5

Idle Time Out:  (1-1000 Minute) 6

7

Here are descriptions of every setup items:

- 
- User Name (1): Please input user ID (user name) assigned by your Internet service provider here.*
- Password (2): Please input the password assigned by your Internet service provider here.*
- L2TP Gateway (3): Please input the IP address of PPTP gateway assigned by your Internet service provider here.*
- Connection ID (4): Please input the connection ID here, this is optional and you can leave it blank.*
- MTU (5): Please input the MTU value of your network connection here. If you don't know, you can use default value.*
- Connection Type (5): Please select the connection type of Internet connection you wish to use, please refer to section*

2-5-3 for detailed descriptions.

*Idle Time Out (6): Please input the idle time out of Internet connection you wish to use, and refer to section 2-5-3 for detailed descriptions.*

When you finish with all settings, please click 'Apply' (7); if you want to go back to previous menu, click 'Cancel'.

### **2-5-6 Setup procedure for 'DNS':**

If you select 'Dynamic IP' or 'PPPoE' as Internet connection method, at least one DNS server's IP address should be assigned automatically. However, if you have preferred DNS server, or your service provider didn't assign the IP address of DNS server because of any reason, you can input the IP address of DNS server here.

**DNS**

A Domain Name System (DNS) server is similar to an index of IP Addresses and Web Addresses. If you type a Web address into your browser, such as www.broadbandrouter.com, a DNS server will find that name in its index and find the matching IP address. Most Internet Service Providers (ISPs) provide a DNS server for speed and convenience. Since your ISP may connect you to the Internet through dynamic IP settings, it is likely that the DNS server IP Address is also provided dynamically. However, if there is a DNS server that you would rather use, you need to specify the IP Address of that DNS server. The primary DNS will be used for domain name access first, in case the primary DNS access failures, the secondary DNS will be used.

Primary DNS:  1

Secondary DNS:  2

3

Here are descriptions of every setup items:


*Primary DNS (1): Please input the IP address of DNS server provided by your service provider.*

*Secondary DNS (2): Please input the secondary IP address of DNS server provided by your service provider.*

---

**NOTE: Only IP address can be entered here; *DO NOT* use the hostname of DNS server! (i.e. only numeric characters and dots are accepted)**  
**10.20.30.40..... Correct**  
**dns.serviceprovider.com..... Incorrect**

After you finish with all settings, please click 'Apply' (3) button and the following message will be displayed on your web browser:

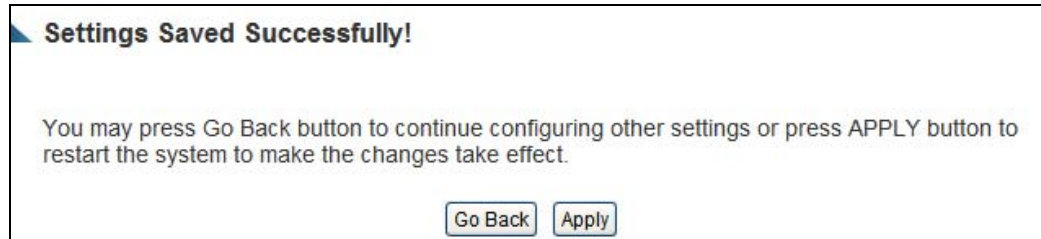

Please click 'Go Back' to go back to previous setup menu, or click 'Apply' to reboot the router so the settings will take effect. Please wait for about 30-60 seconds while router is rebooting.

### ***2-5-7 Setup procedure for 'DDNS':***

DDNS (Dynamic DNS) is an IP-to-Hostname mapping service for those Internet users who don't have a static (fixed) IP address. It will be a problem when such users want to provide services to other users on the Internet, because their IP address will vary every time when connected to the Internet, and other user will not be able to know the IP address they're using at a certain time.

This router supports DDNS service of several service providers, for example:

DynDNS (<http://www.dyndns.org>)

TZO (<http://www.tzo.com>)

Please go to one of the DDNS service provider's web pages listed above, and get a free DDNS account by the instructions given on their webpage.

**Dynamic DNS**

DynamicDNS (DDNS) allows users to map the static domain name to a dynamic IP address. You must get a account, password and your static domain name from the DDNS service providers.

Dynamic DNS:  Enable  Disable 1

Provider: DynDNS 2

Domain Name:  3

Account:  4

Password/Key:  5

6

Here are descriptions of every setup items:

---

*Dynamic DNS (1): If you want to enable DDNS function, please select 'Enabled'; otherwise please select 'Disabled'.*

*Provider (2): Select your DDNS service provider here.*

*Domain Name (3): Input the domain name you've obtained from DDNS service provider.*

*Account / E-Mail (4): Input account or email of DDNS registration.*

*Password / Key (5): Input DDNS service password or key.*

---

After you finish with all settings, please click 'Apply' (6) button and the following message will be displayed on your web browser:

**Settings Saved Successfully!**

You may press Go Back button to continue configuring other settings or press APPLY button to restart the system to make the changes take effect.

Please click 'Go Back' to go back to previous setup menu, or click 'Apply' to reboot the router so the settings will take effect. Please wait for about 30-60 seconds while router is rebooting.

## 2-6 Wired LAN Configuration

Before all computers using wired Ethernet connection (i.e. those computers connected to this router's LAN port 1 to 4 by Ethernet cable) can communicate with each other and access Internet, they must have a valid IP address.

There are two ways to assign IP addresses to computers: static IP address (set the IP address for every computer manually), and dynamic IP address (IP address of computers will be assigned by router automatically. It's recommended for most computers to use dynamic IP address, it will save a lot of time on setting IP addresses for every computer, especially when there are a lot of computers in your network; for servers and network devices which will provide services to other computers and users that come from the Internet, a static IP address should be used.

***Suggestions on IP Address numbering plan:***

**If you have no idea on how to define an IP address plan for your network, here are some suggestions.**

- 1. A valid IP address has 4 fields: a.b.c.d, for most of home and company users, it's suggested to use 192.168.c.d, where c is an integer between 0 and 254, and d is an integer between 1 and 254. This router is capable to work with up to 253 clients, so you can set 'd' field of IP address of router as 1 or 254 (or any number between 1 and 254), and pick a number between 0 and 254 for field 'c'.**
- 2. In most cases, you should use '255.255.255.0' as subnet mask, which allows up to 253 clients (this also meets router's capability of working with up to 253 clients).**
- 3. For all servers and network devices which will provide services to other people (like Internet service, print service, and file service), they should use static IP address. Give each of them a unique number between 1 and 253, and maintain a list, so everyone can locate those servers easily.**
- 4. For computers which are not dedicated to provide specific service to others, they should use dynamic IP address.**

***If you do not understand the descriptions listed above, don't worry! We will provide recommended setup values below.***

Please follow the following instructions to set wired LAN parameters:

Please click 'Local Network' tab at the top of web management interface, there are three setup groups here: 'LAN IP', 'DHCP Server', and 'Static DHCP Leases Table'. Here are setup instructions for each of them:

### 2-6-1 Local Network:

#### Local Network

You can enable the Hi-Gain™ Wireless-150N Router with Range Amplifier's DHCP server to dynamically allocate IP Addresses to your LAN client PCs. The Router must have an IP Address in the Local Area Network.

**LAN IP**

IP Address:  1

Subnet Mask:  2

802.1d Spanning Tree:  3

DHCP Server:  4

**Here are descriptions of every setup item:**

*IP address (1): Please input the IP address of this router.*

*Subnet Mask (2): Please input subnet mask for this network.*

*802.1d Spanning Tree (3): If you wish to activate 802.1d spanning tree function, select 'Enabled' for setup item '802.1d Spanning Tree', or set it to 'Disabled'*

*DHCP Server (4): If you want to activate DHCP server function of this router, select 'Enabled', or set it to 'Disabled'.*

**Recommended Value if you don't know what to fill:**

IP Address: 192.168.1.254	802.1d Spanning Tree: Disabled
Subnet Mask: 255.255.255.0	DHCP Server: Enabled



## 2-6-2 DHCP Server:

DHCP Server

Lease Time: Forever 1

DHCP Client Start IP: 0.0.0.0 2

DHCP Client End IP: 0.0.0.0 3

Domain Name: 4

Cancel Apply

These settings are only available when 'DHCP Server' in 'LAN IP' section is 'Enabled', and here are descriptions of every setup item:

---

*Lease Time (1): Please choose a lease time (the duration that every computer can keep a specific IP address) of every IP address assigned by this router from dropdown menu.*

*Start IP (2): Please input the start IP address of the IP range.*

*End IP (3): Please input the end IP address of the IP range.*

*Domain Name (4): If you wish, you can also optionally input the domain name for your network. This is optional.*

---

### **Recommended Value if you don't know what to fill:**

Lease Time: Two Weeks (or 'Forever', if you have less than 20 computers)

Start IP: 192.168.1.100

End IP: 192.168.1.200

Domain Name: (leave it blank)


### **NOTE:**

- 1. The number of the last field (mentioned 'd' field) of 'End IP' must be greater than 'Start IP', and can not be the same as router's IP address.**
- 2. The former three fields of IP address of 'Start IP', 'End IP', and 'IP Address of 'LAN IP' section (mentioned 'a', 'b', and 'c' field) should be the same.**
- 3. These settings will affect wireless clients too.**

### 2-6-3 Static DHCP Leases Table:

This function allows you to assign a static IP address to a specific computer forever, so you don't have to set the IP address for a computer, and still enjoy the benefit of using DHCP server. A maximum of 16 static IP addresses can be assigned here.

*(If you set 'Lease Time' to 'forever' in 'DHCP Server' section, you can also assign an IP address to a specific computer permanently, however, you will not be able to assign a certain IP address to a specific computer, since IP addresses will be assigned in random order by this way).*

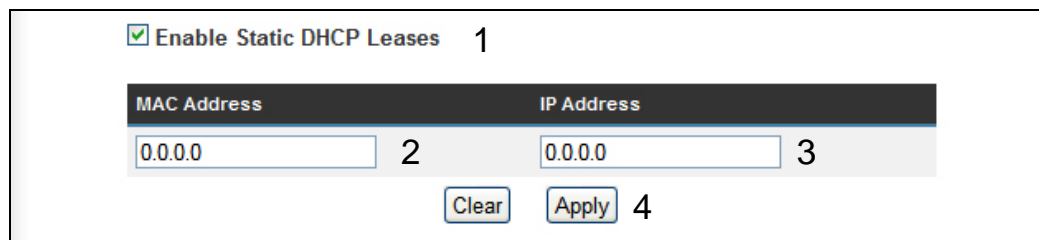

MAC Address	IP Address
0.0.0.0 2	0.0.0.0 3

Clear Apply 4

Here are descriptions of every setup item:

---

<i>Enable Static DHCP Leases (1):</i>	<i>Check this box to enable this function, otherwise uncheck it to disable this function.</i>
<i>MAC Address (2):</i>	<i>Input the MAC address of the computer or network device (total 12 characters, with characters from 0 to 9, and from a to f, like '001122aabbcc')</i>
<i>IP Address (3):</i>	<i>Input the IP address you want to assign to this computer or network device</i>
<i>'Apply' (4):</i>	<i>After you inputted MAC address and IP address pair, click this button to add the pair to static DHCP leases table.</i>

---

If you want to remove all characters you just entered, click 'Clear'.

After you clicked 'Add', the MAC address and IP address mapping will be added to 'Static DHCP Leases Table' section.

Static DHCP Lease Table - Up to 16 entries.			
No.	MAC Address	IP Address	Select
1	00:11:22:33:44:55	192.168.2.100	<input type="checkbox"/> 1

       
2                      3                      4

If you want to delete a specific item, please check the 'Select' box of a MAC address and IP address mapping (1), then click 'Delete Selected' button (2); if you want to delete all mappings, click 'Delete All' (3). If you want to deselect all mappings, click 'Reset' (4).

After you finish all LAN settings, please click 'Apply' button on the bottom of this page. After you click 'Apply', the following message will be displayed on your web browser:

**Settings Saved Successfully!**

You may press Go Back button to continue configuring other settings or press APPLY button to restart the system to make the changes take effect.

Please click 'Go Back' to go back to previous setup menu, or click 'Apply' to reboot the router so the settings will take effect. Please wait for about 30-60 seconds while router is rebooting.

## 2-7 Wireless Network

If your computer, PDA, game console, or other network devices which is equipped with wireless network interface, you can use the wireless function of this router to let them connect to Internet and share resources with other computers with wired-LAN connection. You can also use the built-in security functions to protect your network from being intruded by malicious intruders.

Please click 'General Setup' tab at the top of web management interface, and then click 'Wireless Network' tab on the left menu. The following message will be displayed on your web browser:

### Wireless Network

Your local wireless network status is displayed below. To enable or disable wireless access to your router, adjust the switch labeled "Wireless Radio On/Off" on the back of the router.

Local Wireless Network:  Enabled

### Settings Saved Successfully!

You may press Go Back button to continue configuring other settings or press APPLY button to restart the system to make the changes take effect.

Please click 'Go Back' to go back to previous setup menu, or click 'Apply' to reboot the router so the settings will take effect. Please wait for about 30-60 seconds while router is rebooting.

## 2-7-1 Basic Wireless Settings

Please click 'Basic Setup' menu at the top of web management interface, then click 'Basic Settings', and the following message will be displayed on your web browser:

### Basic Settings

Select a specific wireless operating mode and configure the settings below. The standard wireless operating mode is Wireless Access Point where users are allowed to log onto your network wirelessly. The SSID is the name used by others to identify your network. If you wish to choose another mode select it from the drop down menu below.

Mode:  1

Band:  2

SSID:  3

Channel Number:  4

Associated Clients:  5

This wireless router can work in 6 modes:

- a. *Access Point*: Standard wireless AP (Access Point).
- b. *Station (Infrastructure)*: Configure the router to Ethernet devices such as TV, Game player, HDD & DVD to enable the Ethernet device to be a wireless station.
- c. *AP Bridge (Point to Point)*: Connect this router with another wireless router, to expand the scope of network.
- d. *AP Bridge (Point to Multi-Point)*: Connect this router with up to four other wireless routers, to expand the scope of network.
- e. *AP Bridge (WDS)*: Connect this router with up to four WDS-capable wireless routers, to expand the scope of network.

f. *Universal Repeater*: The router can act as Station and AP at the same time. It can use Station function to connect to a Root AP and use AP function to service all wireless stations within its coverage.

**NOTE: For 'AP Bridge (Point to Point)' and 'AP Bridge (Point to Multi-Point)' mode, wireless router is operated in wireless bridge dedicated mode – wireless router is only used to expand the scope of network, and no wireless clients will be accepted. If you want to use your wireless router to expand the scope of network, and also accept wireless clients, please select 'AP Bridge (WDS)' or 'Universal Repeater' mode.**

Please select a proper operation mode you want to use from 'Mode' dropdown menu (1), and continue on other operation mode specific settings:

- |                                  |                                |
|----------------------------------|--------------------------------|
| AP                               | - Please go to section 2-7-1-1 |
| Station (Infrastructure)         | - Please go to section 2-7-1-2 |
| AP Bridge (Point to Point)       | - Please go to section 2-7-1-3 |
| AP Bridge (Point to Multi Point) | - Please go to section 2-7-1-4 |
| AP Bridge (WDS)                  | - Please go to section 2-7-1-5 |

### 2-7-1-1 Setup procedure for 'AP':

Please select the radio band you want to use from 'Band' dropdown menu (2), and the following message will be displayed:

#### Basic Settings

Select a specific wireless operating mode and configure the settings below. The standard wireless operating mode is Wireless Access Point where users are allowed to log onto your network wirelessly. The SSID is the name used by others to identify your network. If you wish to choose another mode select it from the drop down menu below.

Mode:  1

Band:  2

SSID:  3

Channel Number:  4

Associated Clients:  5

Here are descriptions of every setup items:

---

*Band (2): Please select the radio band from one of following options:*

2.4 GHz (B)	2.4GHz band, only allows 802.11b wireless network clients to connect to this router (maximum transfer rate 11Mbps).
2.4 GHz (N)	2.4GHz band, only allows 802.11n wireless network clients to connect to this router (maximum transfer rate 300Mbps).
2.4 GHz (B+G)	2.4GHz band, only allows 802.11b and 802.11g wireless network clients to connect to this router (maximum transfer rate 11Mbps for 802.11b clients, and maximum 54Mbps for 802.11g clients).
2.4 GHz (G)	2.4GHz band, only allows 802.11g wireless network clients to connect to this router (maximum transfer rate 54Mbps).
2.4 GHz (B+G+N)	2.4GHz band, allows 802.11b, 802.11g, and 802.11n wireless network clients to connect to this router (maximum transfer rate 11Mbps for 802.11b clients, maximum 54Mbps for 802.11g

**NOTE: For 802.11b and 802.11g mode, the signals can be transmitted only by antenna 1 (The antenna on the right side of the rear panel).**

**For 802.11n mode: The router is operating in a 2T3R Spatial Multiplexing MIMO configuration. Two (2) antennas are for signal transmitting and three (3) antennas are for signal receiving.**

*ESSID (3): This is the name of wireless router. You can type any alphanumerical characters here, maximum 32 characters. ESSID is used to identify your own wireless router from others when there are other wireless routers in the same area. Default SSID is 'default', it's recommended to change default ESSID value to the one which is meaningful to you, such as, 'myhome', 'office\_room1', etc.*

*Channel Number (4): Please select a channel from the dropdown list of 'Channel Number', available channel numbers are 1 to 13 for European countries, 1 to 11 for USA. You can choose any channel number you want to use, and almost all wireless clients can locate the channel you're using automatically without any problem. However, it's still useful to remember the channel number you use, as some wireless clients support manual channel number selecting, and this would help in certain scenarios when there is some radio communication problems.*

*Associated Clients (5): Click 'Show Active Clients' button, then an "Active Wireless Client Table" will pop up. You can see the status of all active wireless stations that are connecting to the access point.*

---


**NOTE: If you don't have special reason to limit the type of allowed wireless clients, it's recommended to choose '2.4 GHz (B+G+N) to maximize wireless client compatibility.**



**TIP: You can try to change channel number to another one if you think the data transfer rate is too slow. There could be some other wireless routers using the same channel, which will disturb the radio communication between wireless client and the wireless router.**

### **2-7-1-2 Setup procedure for ‘Station (Infrastructure)’:**

In this mode, you can connect the router to Ethernet device such as TV, Game player, HDD&DVD to enable the Ethernet device to be a wireless station and join to a wireless network through an access point or AP router.

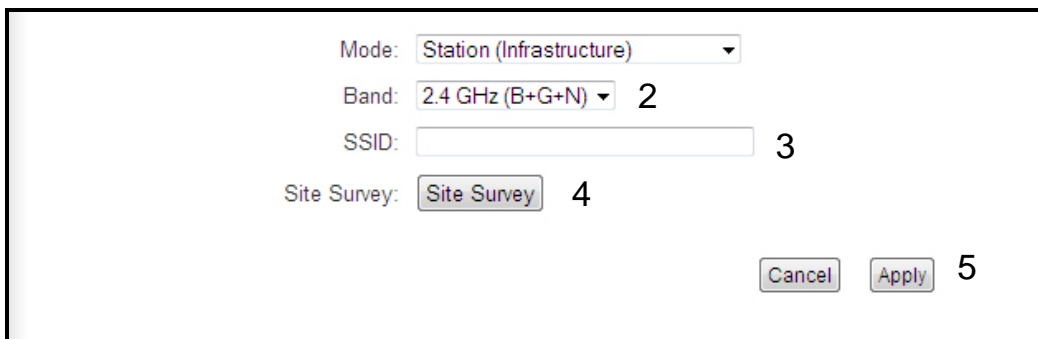

Mode: Station (Infrastructure) ▾  
Band: 2.4 GHz (B+G+N) ▾ 2  
SSID:  3  
Site Survey:  4  
  5

Here are descriptions of every setup item:


---

<i>Band (2)</i>	<i>Select the band you want to use.</i>
<i>SSID (3)</i>	<i>This is the name of wireless network. You can type the SSID of the network you would like to connect here.</i>
<i>Site Survey (4)</i>	<i>When you use this wireless router as a wireless station for Ethernet network device to have wireless capability, you have to associate it with a working access point. Click ‘Select Site Survey’ button, then a “Wireless Site Survey Table” will pop up. It will list all available access points nearby. You can select one access point in the table and it will join wireless LAN through this access point.</i>

---

### 2-7-1-3 Setup procedure for 'AP Bridge (Point to Point)':

In this mode, you can connect your wireless router with another, to combine two access points and expand the scope of wireless network, and all clients (wired only – AP will not accept wireless clients in this mode) of two wireless routers will think they're on the same physical network. This function is very convenient when you need to connect two networks between two buildings. Here are instructions about how to connect two wireless routers together:

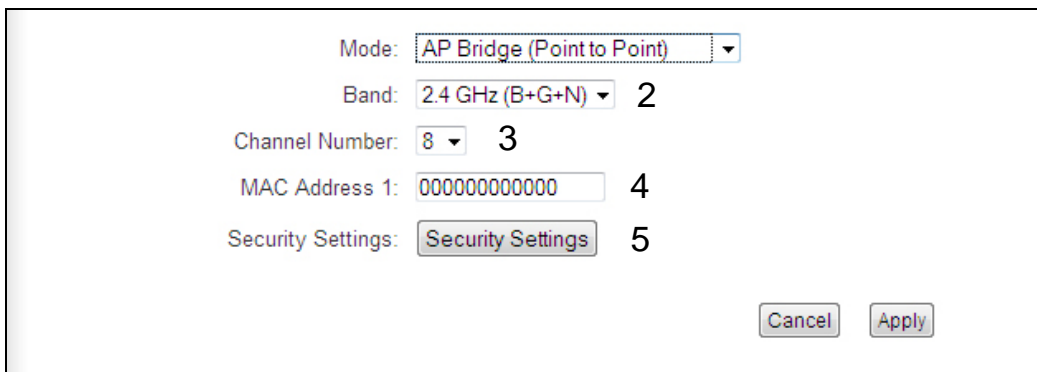

The screenshot shows a configuration window for 'AP Bridge (Point to Point)' mode. It includes the following fields and controls:

- Mode:  (dropdown menu)
- Band:  (dropdown menu) 2
- Channel Number:  (dropdown menu) 3
- MAC Address 1:  4
- Security Settings:  5
- Buttons:  and

**NOTE: Two wireless routers must use the same mode, band, channel number, and security setting!**

Here are descriptions of every setup items:

---

<i>Band (2)</i>	<i>Select the band you want to use, two wireless routers must use the same setting.</i>
<i>Channel Number (3)</i>	<i>Select the channel you want to use, two wireless routers must use the same setting.</i>
<i>MAC Address (4)</i>	<i>Input the MAC address of another wireless router.</i>
<i>Set Security (5)</i>	<i>Click to set security settings for this connection (Please go to section '2-7-3 Wireless Security' for detailed instructions).</i>

---

### **2-7-1-4 Setup procedure for ‘AP Bridge (Point to Multi-Point)’:**

In this mode, you can connect your wireless router with at least four wireless routers to expand the scope of wireless network, and all clients (wired only – AP will not accept wireless clients in this mode) of the wireless routers will think they’re on the same physical network.

Mode: AP Bridge (Point to Multi-Point) ▾  
Band: 2.4 GHz (B+G+N) ▾ 2  
Channel Number: 8 ▾ 3  
MAC Address 1:  4  
MAC Address 2:  5  
MAC Address 3:  6  
MAC Address 4:  7  
Security Settings: Security Settings 8  
Cancel Apply

Here are descriptions of every setup items:

---

*Band (2)*                      *Select the band you want to use, all the wireless routers must use the same setting.*

*Channel Number (3)*      *Select the channel you want to use, all the wireless routers must use the same setting.*

*MAC Address*                *Input the MAC Address of other wireless routers.*  
*1 to 4 (4 - 7)*

*Set Security (8)*            *Click to set security settings for this connection (Please go to section ‘2-7-3 Wireless Security’ for detailed instructions).*

---

## 2-7-1-5 Setup procedure for 'AP Bridge (WDS)'

In this mode, you can expand the scope of network by combining up to four other access points together, and every access point can still accept wireless clients.

**NOTE: For WDS mode, the output signal nature is the same as that of normal AP mode.**

Mode: AP Bridge (WDS) ▾  
Band: 2.4 GHz (B+G+N) ▾ 2  
SSID:  3  
Channel Number: 8 ▾ 4  
Associated Clients:   
MAC Address 1:  5  
MAC Address 2:  6  
MAC Address 3:  7  
MAC Address 4:  8  
Security Settings:  9  
  10

Here are descriptions of every setup items:

---

**Band (2):** *Select the band you want to use, all the wireless routers must use the same setting.*

**SSID (3):** *Input the SSID of your wireless router, the setting should be the same with other wireless routers for the convenience of roaming.*

**Channel Number (4):** *Select the channel you want to use, all the wireless routers must use the same setting.*

*Associated Clients:* Click 'Show Active Clients' button, then an "Active Wireless Client Table" will pop up. You can see the status of all active wireless stations that are connecting to the access point.

*MAC address 1 to 4 (6 - 8):* Input the MAC address of other wireless routers.

*Set Security (9):* Click to set security settings for this connection (Please go to section '2-7-3 Wireless Security' for detailed instructions).

---

### **2-7-1-6 Setup procedure for 'Universal Repeater'**

In this mode, the router can act as a wireless repeater; it can be set as Station and AP at the same time. It can utilize the Station function to connect to a Root AP and use AP function to service all wireless stations within its coverage.

**NOTE: For Repeater Mode, this router will demodulate the received signal, checking if this signal is noise for the operating network then have the signal modulated and amplified again. The output power of this mode is the same as that of WDS and normal AP mode.**

The screenshot shows a configuration window for the 'Universal Repeater' mode. The settings are as follows:

- Mode: Universal Repeater (dropdown menu)
- Band: 2.4 GHz (B+G+N) (dropdown menu) 2
- SSID: [empty text box] 3
- Channel Number: 8 (dropdown menu) 4
- Associated Clients: Show Active Clients (button) 5
- Root AP SSID: [empty text box] 6
- Site Survey: Site Survey (button) 7

At the bottom right, there are 'Cancel' and 'Apply' buttons.

Here are descriptions of every setup items:

---

<i>Band (2)</i>	<i>Select the band you want to use, all the wireless routers must use the same setting.</i>
<i>SSID (3)</i>	<i>This is the name of wireless router. You can type any alphanumerical characters here, maximum 32 characters. SSID is used to identify your own wireless router from others when there are other wireless routers in the same area. Default SSID is 'default', it's recommended to change default ESSID value to the one which is meaningful to you, such as, 'myhome', 'office_room1', etc.</i>
<i>Channel Number (4)</i>	<i>Select the channel you want to use, all the wireless clients must use the same setting.</i>
<i>Associated Clients (5):</i>	<i>Click 'Show Active Clients' button, then an "Active Wireless Client Table" will pop up. You can see the status of all active wireless stations that are connecting to the access point.</i>
<i>Root AP SSID (6):</i>	<i>In 'Universal Repeater' mode, this device can act as a station to connect to a Root AP. You should assign the SSID of the Root AP here or click 'Select Site Survey' button to choose a Root AP.</i>
<i>Site Survey (7):</i>	<i>Click 'Select Site Survey' button, then a "Wireless Site Survey Table" will pop up. It will list all available access points nearby. You can select one access point in the table and the router will join wireless LAN through this access point.</i>

---

After you finish the wireless setting, please click 'Apply' button and the following message will be displayed on your web browser:

**Settings Saved Successfully!**

You may press Go Back button to continue configuring other settings or press APPLY button to restart the system to make the changes take effect.

Please click 'Go Back' to go back to previous setup menu, or click 'Apply' to reboot the router so the settings will take effect. Please wait for about 30 seconds while router is rebooting.

## 2-7-2 Advanced Wireless Settings

This router provides some advanced control of wireless parameters, if you want to configure these settings, please click 'Wireless' tab at the top of web management interface, then click 'Advanced Settings', and the following message will be displayed on your web browser:

### Advanced Settings

Advanced wireless settings for your Wireless Network.

Fragment Threshold:  (256 - 23456) 1

RTS Threshold:  (0-2347) 2

Bacon Interval:  (20-1000 ms) 3

DTIM Period:  (0-2347) 4

Data Rate:  5

N Data Rate:  6

Channel Width:  Auto 20/40 MHZ  20 MHZ 7

Preamble Type:  Short Preamble  Long Preamble 8

Broadcast ESSID:  Enable  Disable 9

CTS Protect:  Auto  Always  None 10

Transmit Power:  11

WMM:  Enable  Disable 12

Here are descriptions of every setup items:

---

*Fragment Threshold(1): Set the Fragment threshold of wireless radio.*

***Do not modify the default value if you do not understand the function, default value is '2346'.***

*RTS Threshold(2): Set the RTS threshold of wireless radio. **Do not modify the default value if you do not understand the function, default value is '2347'.***




- Beacon Interval(3):* Set the beacon interval of wireless radio. **Do not modify the default value if you do not understand the function, default value is '100'.**
- DTIM Period(4):* Set the DTIM period of wireless radio. **Do not modify the default value if you do not understand the function, default value is '3'.**
- Data Rate(5):* Set the wireless data transfer rate to a certain value. Since most of wireless devices will negotiate with each other and pick a proper data transfer rate automatically. **It is not necessary to change this value unless you know what will happen after modification.**
- N Data Rate(6):* Same as above, but only for 802.11n clients.
- Channel Width(7):* Set channel width of wireless radio. **Do not modify the default value if you do not understand the function, default setting is 'Auto 20/40 MHz'.**
- Preamble Type(8):* Set the type of preamble, **do not modify the default value if you do not know what it is, default setting is 'Short Preamble'.**
- Broadcast ESSID(9):* Decide if the wireless router will broadcast its own ESSID or not. You can hide the ESSID of your wireless router (set the option to 'Disable'), so only those people who know the ESSID of your wireless router can connect to the unit.
- CTS Protect(10):* Enabling this setting will reduce the chance of radio signal collisions between 802.11b and 802.11g/n wireless access points. It is recommended to set this option to 'Auto' or 'Always'. However, if you set to 'None', your wireless router should be able to function properly.

*Transmit Power(11): You can set the output power of wireless radio. Unless you are using this wireless router in a large open space, you may not have to set output power to 100%. **This will enhance security (malicious / unauthorized users in distance will not be able to reach your wireless router).***

*WMM(12): Wi-Fi MultiMedia (WMM) will enhance the data transfer performance of multimedia contents when they are being transferred over a wireless network. **If you do not understand the function, then it is safe to set this option to 'Enable', however, default value is 'Disable'.***

---

After you finish these wireless settings, please click 'Apply' button, button, and the following message will be displayed on your web browser:

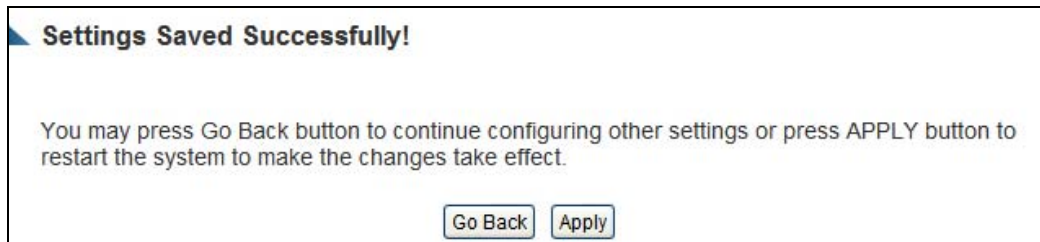

Please click 'Go Back' to go back to previous setup menu; to continue on router setup, or click 'Apply' to reboot the router so the settings will take effect. Please wait for about 30 seconds while router is rebooting.

### **2-7-3 Security Settings**

***It is important to set your wireless security settings properly!*** If you do not configure a wireless security setting, unauthorized users can use your network and/or obtain valuable data without your consent.

To set wireless security settings, please click 'General Setup' tab at the top of web management interface, then click 'Wireless Network' tab and 'Security Settings' tab. Please follow the following instructions to set wireless security settings:

Please select an encryption method from the 'Encryption' dropdown menu, there are four options:


#### **2-7-3-1 Disable wireless security**

When you select this mode, data encryption is disabled, and every wireless device in proximity will be able to connect your wireless router if no other security measure is enabled (like MAC address access control - see section 2-7-4, or disable SSID broadcast).

***Use this option only when you want to allow any user to use your wireless router, and you are not concerned about unauthorized access to your files and/or transfers over your network.***

## 2-7-3-2 WEP - Wired Equivalent Privacy

When you select this mode, the wireless router will use WEP encryption, and the following setup menu will be shown on your web browser:

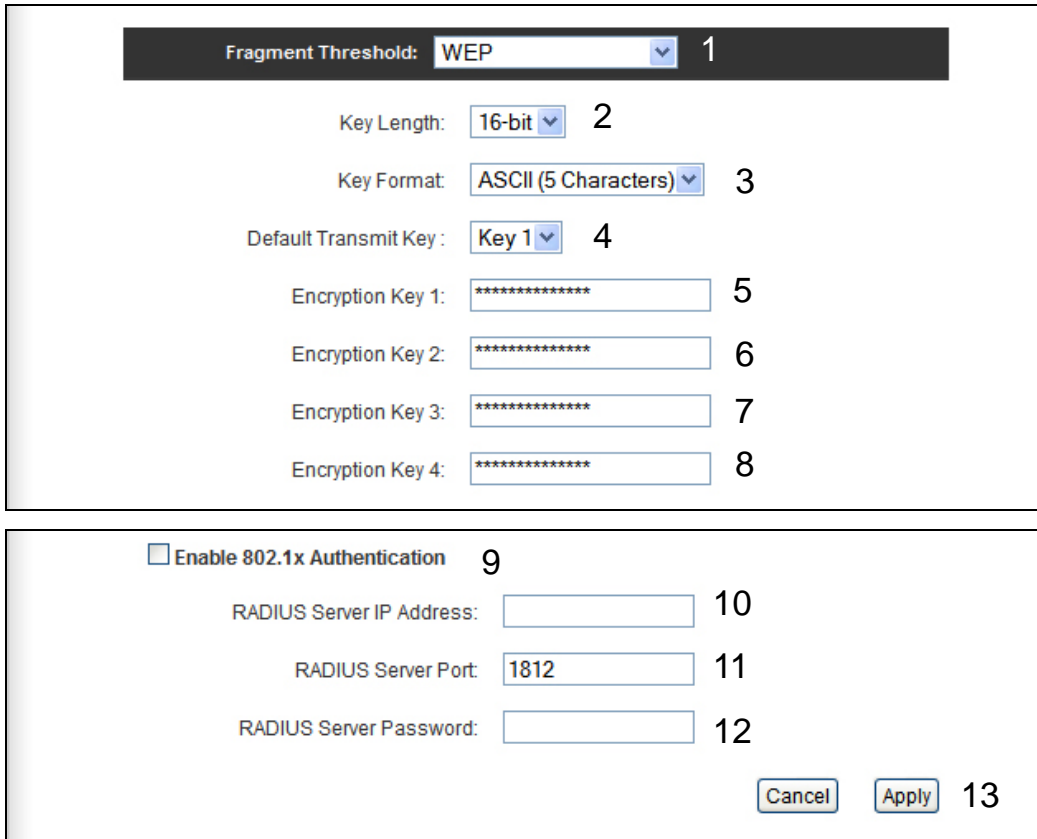

Fragment Threshold: WEP 1

Key Length: 16-bit 2

Key Format: ASCII (5 Characters) 3

Default Transmit Key : Key 1 4

Encryption Key 1: \*\*\*\*\* 5

Encryption Key 2: \*\*\*\*\* 6

Encryption Key 3: \*\*\*\*\* 7

Encryption Key 4: \*\*\*\*\* 8

Enable 802.1x Authentication 9

RADIUS Server IP Address: 10

RADIUS Server Port: 1812 11

RADIUS Server Password: 12

Cancel Apply 13

Here are descriptions of every setup item:

- 
- Key Length (2): There are two types of WEP key length: 64-bit and 128-bit. Using '128-bit' is safer than '64-bit', but will reduce some data transfer performance.*
- Key Format (3): There are two types of key format: ASCII and Hex. When you select a key format, the number of characters of key will be displayed. For example, if you select '64-bit' as key length, and 'Hex' as key format, you'll see the message at the right of 'Key Format' is 'Hex (10*

characters), which means the length of WEP key is 10 characters.

*Default Tx Key (4):* You can set up to four sets of WEP key, and you can decide which key is being used by default here. **If you don't know which one you should use, select 'Key 1'.**

*Encryption Key 1 to 4 (5-8):* Input WEP key characters here, the number of characters must be the same as the number displayed at 'Key Format' field. You can use any alphanumerical characters (0-9, a-z, and A-Z) if you select 'ASCII' key format, and if you select 'Hex' as key format, you can use characters 0-9, a-f, and A-F. You must enter at least one encryption key here, and if you entered multiple WEP keys, they should not be same with each other.

*Enable 802.1x Authentication (9):* IEEE 802.1x is an authentication protocol. Every user must use a valid account to login to this wireless router before accessing the wireless LAN. The authentication is processed by a RADIUS server. This mode only authenticates user by IEEE 802.1x, but it does not encryption the data during communication. If there is a RADIUS server in you environment, please enable this function. Check this box and another sub-menu will appear:

*RADIUS Server IP address (10):* Please input the IP address of RADIUS server here.

*RADIUS Server Port (11):* Please input the port number of RADIUS server here.

*RADIUS Server Password (12):* Please input the password here.

---

**TIPS: Examples of WEP key (DO NOT USE!)**

ASCII (5 characters): pilot phone 23561 2Hyux #@xml

ASCII (13 characters): digitalFAMILY 82Jh26xHy3m&n

Hex (10 characters): 287d2aa732 1152dabc85

Hex (26 characters): 9284bcda8427c9e036f7abcd84

**To improve security level, do not use words that can be found in a dictionary or are easy to remember! Words such as 'pilot' and 'phone' listed above are bad examples.**

**Wireless clients will automatically remember the WEP key, so you only have to input the WEP key on wireless client once, and it is suggested that to use a complex WEP key to improve security level. Once you have chosen a password, write it down and keep it in a secure place.**

After you finish WEP setting, please click 'Apply' (13) button and the following message will be displayed on your web browser:


**Settings Saved Successfully!**

You may press Go Back button to continue configuring other settings or press APPLY button to restart the system to make the changes take effect.

Please click 'Go Back' to go back to previous setup menu, or click 'Apply' to reboot the router so the settings will take effect. Please wait about 30 seconds while the router is rebooting.

### 2-7-3-3 Wi-Fi Protected Access (WPA):

When you select this mode, the wireless router will use WPA encryption, and the following setup menu will be shown on your web browser:

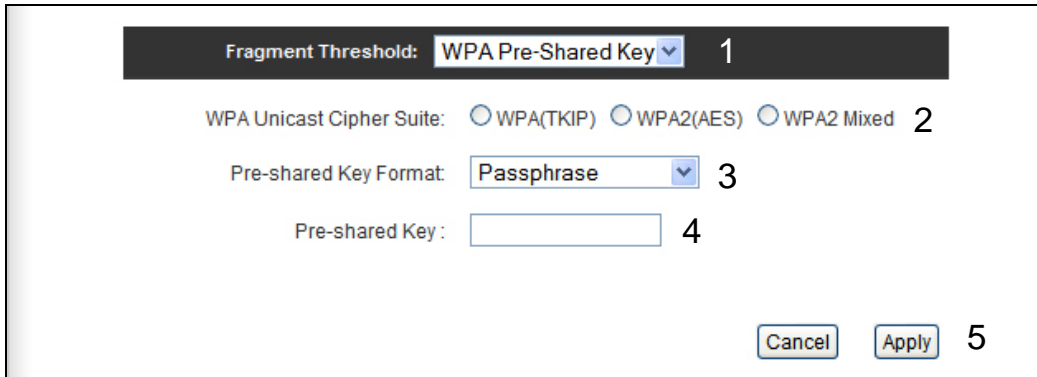

The screenshot shows a configuration page for WPA Pre-Shared Key. At the top, there is a dark header bar with the text 'Fragment Threshold: WPA Pre-Shared Key' and a small number '1'. Below this, there are three radio button options for 'WPA Unicast Cipher Suite': 'WPA(TKIP)', 'WPA2(AES)', and 'WPA2 Mixed', with a small number '2' to the right. Underneath, there is a dropdown menu for 'Pre-shared Key Format' set to 'Passphrase', with a small number '3' to the right. Below that is a text input field for 'Pre-shared Key', with a small number '4' to the right. At the bottom right, there are two buttons: 'Cancel' and 'Apply', with a small number '5' to the right.

Here are descriptions of every setup items:

---

<i>WPA Unicast Cipher Suite (2):</i>	<i>Please select a type of WPA cipher suite. Available options are: WPA (TKIP), WPA2 (AES), and WPA2 Mixed. You can select one of them, but you have to make sure your wireless client support the cipher you selected.</i>
<i>Pre-shared Key Format (3):</i>	<i>Select the type of pre-shared key, you can select Passphrase (8 or more alphanumerical characters, up to 63), or Hex (64 characters of 0-9, and a-f).</i>
<i>Pre-shared Key (4):</i>	<i>Please input the WPA passphrase here. <b>It's not recommended to use a word that can be found in a dictionary due to security reason.</b></i>

---

After you finish WPA Pre-shared key setting, please click 'Apply' button (5) and the following message will be displayed on your web browser:

**Settings Saved Successfully!**

You may press Go Back button to continue configuring other settings or press APPLY button to restart the system to make the changes take effect.


Please click 'Go Back' to go back to previous setup menu, or click 'Apply' to reboot the router so the settings will take effect. Please wait for about 30 seconds while router is rebooting.

**NOTE: Some wireless clients (especially those manufactured before year 2003) only support WEP or WPA (TKIP) cipher. A driver upgrade would be needed for those clients to use WPA and WPA2 encryption.**



## 2-7-3-4 WPA RADIUS:

If you have a RADIUS server, this router can work with it and provide safer wireless authentication.

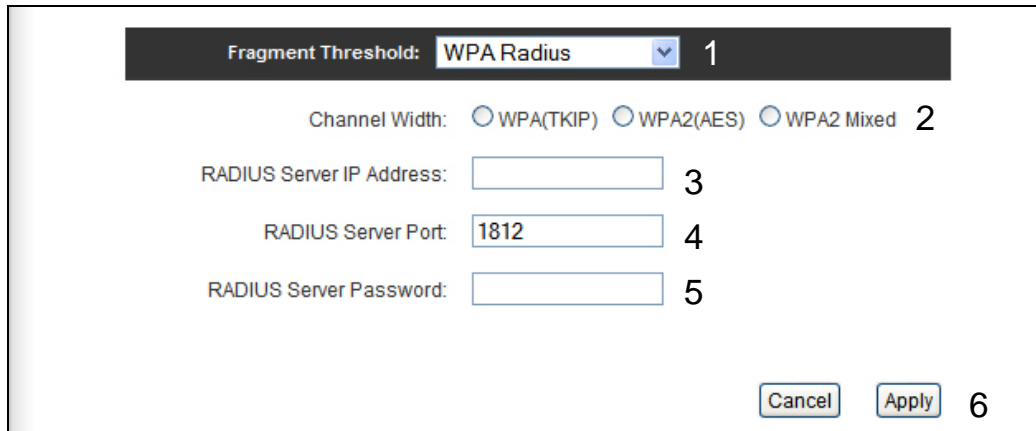

Fragment Threshold: WPA Radius 1

Channel Width:  WPA(TKIP)  WPA2(AES)  WPA2 Mixed 2

RADIUS Server IP Address:  3

RADIUS Server Port: 1812 4

RADIUS Server Password:  5

Cancel Apply 6

Here are descriptions of every setup items:

---

<i>WPA Unicast Cipher Suite:</i>	<i>Please select a type of WPA cipher suite. Available options are: WPA (TKIP), WPA2 (AES), and WPA2 Mixed. You can select one of them, but you have to make sure your wireless client support the cipher you selected.</i>
<i>RADIUS Server IP address (3):</i>	<i>Please input the IP address of your Radius authentication server here.</i>
<i>RADIUS Server Port (4):</i>	<i>Please input the port number of your Radius authentication server here. <b>Default setting is 1812.</b></i>
<i>RADIUS Server Password (5):</i>	<i>Please input the password of your Radius authentication server here.</i>

---

After you finish with all settings, please click 'Apply' (6) button and the following message will be displayed on your web browser:

**Settings Saved Successfully!**

You may press Go Back button to continue configuring other settings or press APPLY button to restart the system to make the changes take effect.

Please click 'Go Back' to go back to previous setup menu, or click 'Apply' to reboot the router so the settings will take effect (Please wait for about 30 seconds while router is rebooting).

## 2-7-4 Wireless Access Control

This function will help you prevent unauthorized users from connecting to your wireless router; only those wireless devices who have a MAC address you assigned can gain access to your wireless router. Use this function with other security measures described in previous section, to create a safer wireless environment.

You can add up to 20 MAC addresses by using this function. Please click 'General Setup' tab at the top of web management interface, click 'Wireless Network' tab, and then click 'Access Control', and the following message will be displayed on your web browser:

The screenshot shows the 'Access Control' configuration page. At the top, there is a title 'Access Control' and a descriptive paragraph: 'For additional security, the Hi-Gain™ Wireless-150N Router with Range Amplifier features MAC Address Filtering that only allows authorized MAC Addresses to connect through the Repeater.' Below this is a section titled 'MAC Address Filtering Table - up to 20 entries.' which contains a table with columns 'No.', 'MAC Address', 'Comment', and 'Select'. The table is currently empty. To the right of the table are two buttons: 'Delete' and 'Delete All'. Below the table is a dashed box containing a checkbox labeled 'Enable Access Control' which is checked. Underneath the checkbox is another table with columns 'MAC Address' and 'Comment'. The 'MAC Address' field contains '0.0.0.0' and the 'Comment' field is empty. Below this table are two buttons: 'Clear' and 'Apply'. Numbered callouts (1-8) point to various elements: 1 points to the table title, 2 to the 'Delete' button, 3 to the 'Delete All' button, 4 to the 'Enable Access Control' checkbox, 5 to the 'MAC Address' input field, 6 to the 'Comment' input field, 7 to the 'Apply' button, and 8 to the 'Clear' button.

**Access Control**

For additional security, the Hi-Gain™ Wireless-150N Router with Range Amplifier features MAC Address Filtering that only allows authorized MAC Addresses to connect through the Repeater.

1 **MAC Address Filtering Table - up to 20 entries.**

No.	MAC Address	Comment	Select
-----	-------------	---------	--------

2 Delete Delete All 3

4  Enable Access Control

MAC Address	Comment
5 0.0.0.0	6

8 Clear Apply 7

All allowed MAC addresses will be displayed in 'MAC Address Filtering Table' (1). Here are descriptions of every setup items:

---

*Delete Selected (2): If you want to delete a specific MAC address entry, check the 'select' box of the MAC address you want to delete, then click 'Delete Selected' button. (You can select more than one MAC addresses).*

*Delete All (3): If you want to delete all MAC addresses listed here, please click 'Delete All' button.*

*Enable Wireless Access Control (4): To enforce MAC address filtering, you have to check 'Enable Wireless Access Control'. When this item is unchecked, wireless router will not enforce MAC address filtering of wireless clients.*

*MAC Address (5): Input the MAC address of your wireless devices here, dash ( - ) or colon ( : ) are not required. (i.e. If the MAC address label of your wireless device indicates 'aa-bb-cc-dd-ee-ff' or 'aa:bb:cc:dd:ee:ff', just input 'aabbccddeeff'.*

*Comment (6): You can input any text here as the comment of this MAC address, like 'ROOM 2A Computer' or anything. You can input up to 16 alphanumerical characters here. This is optional and you can leave it blank, however, it's recommended to use this field to write a comment for every MAC addresses as a memory aid.*

*Apply (7): Click 'Apply' button to add the MAC address and associated comment to the MAC address filtering table.*

*Clear (8): Click 'Clear' to remove the value you inputted in MAC address and comment field.*

---

After you finish with all settings, please click 'Apply' (10) button and the following message will be displayed on your web browser:



Please click 'Go Back' to go back to previous setup menu, or click 'Apply' to reboot the router so the settings will take effect. Please wait for about 30 seconds while router is rebooting.

### ***2-7-5 Wi-Fi Protected Setup (WPS)***

Wi-Fi Protected Setup (WPS) is the simplest way to build connection between wireless network clients and this wireless router. You don't have to select an encryption mode and input a long encryption passphrase every time when you need to set up a wireless client, you only have to press a button on the wireless client and this wireless router, and the WPS will automatically configure for you.

This wireless router supports two types of WPS: Push-Button Configuration (PBC), and PIN code. If you want to use PBC, you have to push a specific button on the wireless client to start WPS mode, and switch this wireless router to WPS mode too. You can push Reset/WPS button of this wireless router, or click 'Start PBC' button in the web configuration interface to do this; if you want to use PIN code, you have to know the PIN code of wireless client and switch it to WPS mode, then provide the PIN code of the wireless client you wish to connect to this wireless router. The detailed instructions are listed follow:

Please click 'General Setup' tab at the top of web management interface, click 'Wireless Network' tab, and then click 'WPS', and the following message will be displayed on your web browser:

### Wi-Fi Protected Setup (WPS)

This section allows you to change the setting for Wi-Fi Protected Setup (WPS). Wi-Fi Protected Setup can help your wireless client automatically connect to the Hi-Gain™ Wireless-N Router with Range Amplifier.

1  Enable WPS

2 **WPS Information**

WPS Status: Configured

PinCode Self:

SSID: Hawking\_150N

Authentication Mode: Disable

Passphrase Key:

**Device Configure**

Config Mode:  3

Configure by Push Button:  4

Configure by Client PinCode:   5

Here are descriptions of every setup items:

---

*Enable WPS (1)      Check this box to enable WPS function, uncheck it to disable WPS.*

*Wi-Fi Protected Setup WPS-related system information will be displayed Information here: (2)*

*WPS Status: If the wireless security (encryption) function of this wireless router is properly set, you'll see 'Configured' message here. If wireless security function has not been set, you'll see 'Not configured'.*

*Self PIN code: This is the WPS PIN code of this wireless router. This code is useful when you need to build wireless connection by WPS with other WPS-enabled wireless devices.*

*SSID: The SSID of this wireless router will be displayed here.*

*Authentication Mode: The wireless security authentication mode of this wireless router will be displayed here. If you do not enable security function of the wireless router before WPS is activated, the router will auto set the security to WPA (AES) and generate a set passphrase key for WPS connection.*

*Passphrase Key: The wireless security key of the router will be displayed here.*

*Config Mode (3) There are 'Registrar' and 'Enrollee' modes for the WPS connection. When 'Registrar' is enabled, the wireless clients will follow the router's wireless settings for WPS connection. When 'Enrollee' mode is enabled, the router will follow the wireless settings of wireless client for WPS connection.*

*Configure via Push Button (4) Click 'Start PBC' to start Push-Button style WPS setup procedure. This wireless router will wait for WPS requests from wireless clients for 2 minutes. The 'WLAN' LED light on the wireless router will be steady for 2 minutes when this wireless router is waiting for incoming WPS request.*

*Configure via client PinCode (5) Please input the PIN code of the wireless client you wish to connect, and click 'Start PIN' button. The 'WLAN' LED light on the wireless router will be steady when this wireless router is waiting for incoming WPS request.*

---

### ***2-7-6 Security Tips for Wireless Network***

Here are some quick tips to help you improve the security level of your wireless network:

1. Never use simple words for your password, such as, “school,” “apple,” or “computer”) as WEP encryption or WPA passphrase.
2. A complicated (combination of numbers, alphabets, and even symbols) WEP key and WPA passphrase is more secure than simple and short words. Remember that the wireless client is capable of keeping the key or passphrase for you, so you only have to input the complicated key or passphrase once. Once you have chosen a password, write it down and keep it in a secure place.
3. You can hide the ESSID of this router by setting the ‘Broadcast ESSID’ option to ‘Disable’. Your wireless router will not be found by other people in proximity if they are using the Access Point scanning function of their wireless client, and this can reduce unauthorized access.
4. Use ‘Access Control’ function, described in section 2-7-4, to allow authorized users access to the wireless router using their specific MAC address.



## *Chapter III Advanced Functions*

### **3-1 Quality of Service (QoS)**

Quality of Service provides an efficient way for computers on the network to share Internet bandwidth with a promised quality of Internet service. Without QoS, all computers and devices on the network will compete with each other to receive Internet bandwidth, and some applications which require guaranteed bandwidth (ie. video streaming and network telephone) will be affected, therefore an unpleasing result will occur, such as, the interruption of video / audio transfer.

With this function, you can limit the maximum bandwidth or give a guaranteed bandwidth for a specific computer, to avoid unstable bandwidth results.

### 3-1-1 Basic QoS Settings

Please follow the following instructions to set QoS parameters:

Please click 'General Setup' tab at the top of web management interface, and then click 'QoS' tab at the left menu. The following message will be displayed on your web browser:

**Quality of Service (QoS)**

Quality of Service (QoS) refers to the capability of a network to provide better service to selected network traffic. The primary goal of QoS is to provide priority including dedicated bandwidth, controlled jitter and latency (required by some real-time and interactive traffic), and improved loss characteristics. Also important is making sure that providing priority for one or more flows does not make other flows fail.

1  Enable QoS

Total Download Bandwidth : ---Select--- >> 0 kbits 2

Total Upload Bandwidth: ---Select--- >> 0 kbits 3

4

Priority	Rule Name	Upload Bandwidth	Download Bandwidth	Select

Add Edit Delete Delete All Move Up Move Down

5 6 7 8 9 10 11 Apply Cancel

Here are descriptions of every setting:


**Enable QoS (1):** Check this box to enable QoS function, unselect this box if you do not want to enforce QoS bandwidth limitations.

**Total Download Bandwidth (2):** You can set the limit of total download bandwidth in kbits. To disable download bandwidth limitation, input '0' here.

<i>Total Upload bandwidth (3):</i>	<i>You can set the limit of total upload bandwidth in kbits. To disable upload bandwidth limitation, input '0' here.</i>
<i>Current QoS Table (4):</i>	<i>All existing QoS rules will be displayed here.</i>
<i>Add (5):</i>	<i>Click 'add' button to add a new QoS rule, see section 3-1-2 'Add a new QoS rule' below.</i>
<i>Edit (6):</i>	<i>If you want to modify the content of a specific rule, please check the 'select' box of the rule you want to edit, then click 'Edit' button. <b>Only one rule should be selected a time!</b> If you didn't select a rule before clicking 'Edit' button, you'll be prompted to add a new rule.</i>
<i>Delete Selected (7):</i>	<i>You can delete selected rules by clicking this button. You can select one or more rules to delete by check the 'select' the box of the rule(s) you want to delete a time. <b>If the QoS table is empty, this button will be grayed out and cannot be clicked.</b></i>
<i>Delete All (8):</i>	<i>By clicking this button, you can delete all rules currently in the QoS table. <b>If the QoS table is empty, this button will be grayed out and cannot be clicked.</b></i>
<i>Move Up (9):</i>	<i>You can pull up the priority of the QoS rule you selected by clicking this button.</i>
<i>Move Down (10):</i>	<i>You can lower the priority of the QoS rule you selected by clicking this button.</i>

---

After you finish with all settings, please click 'Apply' (11) button and the following message will be displayed on your web browser:

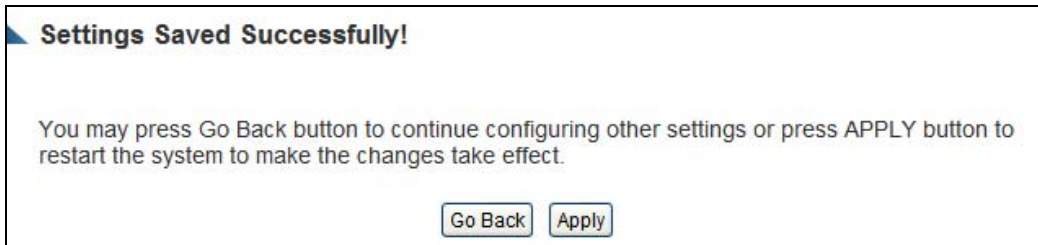

Please click 'Go Back' to go back to previous setup menu, or click 'Apply' to reboot the router so the settings will take effect. Please wait for about 30 seconds while router is rebooting.

### 3-1-2 Add a New QoS Rule

After you click 'Add' button in QoS menu, the following message will appear:

Rule Name :  a

Bandwidth :   Kbps  b

Local IP Address :  -  c

Local Port Range :  d

Remote IP Address :  -  e

Remote Port Range :  f

Traffic Type :  g

Protocol :  h

i

Here are descriptions of every setup items:

- 
- Rule Name (a):** Please give a name to this QoS rule (enter up to 15 alphanumerical characters)
- Bandwidth (b):** Set the bandwidth limitation of this QoS rule. You have to select the data direction of this rule (Upload of Download), and the speed of bandwidth limitation in Kbps, then select the type of QoS: 'guarantee' (guaranteed usable bandwidth for this rule) or 'max' (set the maximum bandwidth for the application allowed by this rule).
- Local IP Address (c):** Specify the local (source) IP address that will be affected by this rule. Please input the starting IP address in the left field, and input the end IP address in the right field to define a range of IP addresses, or just input the IP address in the left field to define a single IP address.

<i>Local Port Range (d):</i>	<i>Please input the range of local (source) port number that will be affected by this rule. If you want to apply this rule on port 80 to 90, please input '80-90'; if you want to apply this rule on a single port, input the port number, such as '80'.</i>
<i>Remote IP Address: (e):</i>	<i>Specify the remote (destination) IP address that will be affected by this rule. Please input the starting IP address in the left field, and input the end IP address in the right field to define a range of IP addresses, or input the IP address in the left field to define a single IP address.</i>
<i>Remote Port Range (f):</i>	<i>Please input the range of remote (destination) port number that will be affected by this rule. If you want to apply this rule on port 80 to 90, please input '80-90'. if you want to apply this rule on a single port, input the port number, such as '80'. If the remote (destination) IP address and/or port number is universal, leave the field blank.</i>
<i>Traffic Type (g):</i>	<i>Please select the traffic type of this rule, available options are None, SMTP, HTTP, POP3, and FTP. You can select a specific traffic type for this rule, if you want to make this rule as a IP address based rule (apply the limitation on all traffics from / to the specified IP address / port number), select 'None'.</i>
<i>Protocol (h):</i>	<i>Please select the protocol type of this rule, the available options are TCP and UDP. If you do not know what protocol your application uses, please try 'TCP' first, and switch to 'UDP' if this rule does not work.</i>

---

After you finish with all settings, please click 'save' button (i), you'll be brought back to previous menu, and the rule you set will appear in the current QoS table.

If your action is incomplete, you will be prompted with an error message when you click 'Save' button, please correct your input by the instructions given by the error message.

If you want to erase all values you entered, click the 'Reset' button.


## 3-2 Network Address Translation (NAT)

Network Address Translations (NAT) solves the problem of sharing a single IP address to multiple computers. Without NAT, all computers must be assigned with a valid Internet IP address to get connected to Internet, but Internet service providers only provide very few IP addresses to every user. Therefore it's necessary to use NAT technology to share a single Internet IP address to multiple computers on local network, so everyone can connect to the Internet.

Please follow the instructions to set NAT parameters:

### 3-2-1 Basic NAT Settings (Enable or disable NAT function)

Please click 'General Setup' tab at the top of web management interface, and then click 'NAT' tab at the left menu. The following message will be displayed on your web browser:

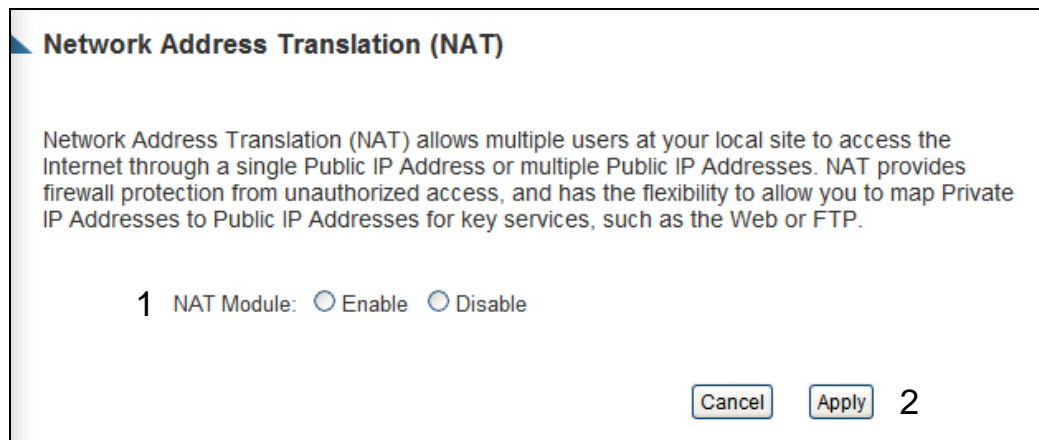

**Network Address Translation (NAT)**

Network Address Translation (NAT) allows multiple users at your local site to access the Internet through a single Public IP Address or multiple Public IP Addresses. NAT provides firewall protection from unauthorized access, and has the flexibility to allow you to map Private IP Addresses to Public IP Addresses for key services, such as the Web or FTP.

1 NAT Module:  Enable  Disable

Cancel Apply 2

To enable NAT function, please select 'Enable' for 'Enable NAT module function' (1); to disable, please select 'Disable'.

After you made the selection, please click 'Apply' button (2) and the following message will be displayed on your web browser:





Please click 'Go Back' to go back to previous setup menu, or click 'Apply' to reboot the router so the settings will take effect. Please wait for about 30 seconds while router is rebooting.

### ***3-2-2 Port Forwarding***

If you enable Network Address Translation (NAT), the Port Forwarding section will be available for configuration.

This function allows you to redirect a single port or consecutive ports of Internet IP address to the same port of the IP address on local network. The port number(s) of Internet IP address and private IP address (the IP address on local network) must be the same. If the port number of Internet IP address and private IP address is different, please use 'Virtual Server' function, described in next section.

Please click 'General Setup' tab at the top of web management interface, click 'NAT' tab at the left menu, and click 'Static Router' tab. The following message will be displayed on your web browser:

1  Enable Port Forwarding

Private IP	Computer Name	Type	Port Range	Select
<input type="text"/>	<input type="text" value="-- Select --"/>	<input type="text" value="Both"/>	<input type="text"/> - <input type="text"/>	6 <input type="text"/>
2	3	4	5	7 <input type="button" value="Cancel"/> <input type="button" value="Apply"/>

10

Current Port Forwarding Table

No.	Computer Name	Private IP	Type	Port Range	Comment	Select

11    12

14   15

Here are descriptions of every setup items:

- 
- Enable Port Forwarding (1):** Check this box to enable port mapping, and uncheck this box to disable port mapping.
- Private IP (2):** Input the IP address of the computer on local network which provides internet service.
- Computer Name (3):** Pull down the menu and all the computers connected to the router will be listed here. You can easily to select the computer name without checking the IP address of the computer.
- Type (4):** Select the type of connection, TCP or UDP. If you are not sure, please select 'Both'.
- Port Range (5):** Input the starting port number in the left field, and input the ending port number in the right field. If you only want to redirect a single port number, just fill the port number in the left field.
- Comment (6):** Please input any text to describe this mapping, up to 16 alphanumerical characters.
- Add (7):** Add the mapping to port forwarding table.

<i>Reset (8):</i>	<i>Remove all inputted values.</i>
<i>Port Forwarding Table (9):</i>	<i>All existing port forwarding mappings will be displayed here.</i>
<i>Delete Selected (10):</i>	<i>Please select a port forwarding mapping by clicking the 'Select' box of the mapping, then click 'Delete Selected' button to remove the mapping. If there's no existing mapping, this button will be grayed out.</i>
<i>Delete (11):</i>	<i>Delete selected existing mapping in virtual server table.</i>
<i>Delete All (12):</i>	<i>Delete all mappings existed in virtual server table.</i>
<i>Reset (13):</i>	<i>Unselect all mappings.</i>

---

Click 'Cancel' (14), if you do not want to make any changes.

After you finish with all settings, please click 'Apply' (15) button and the following message will be displayed on your web browser:



Please click 'Go Back' to go back to previous setup menu, or click 'Apply' to reboot the router so the settings will take effect. Please wait for about 30-60 seconds while router is rebooting.

### 3-2-3 Virtual Server

This function allows you to redirect a port on Internet IP address (on WAN port) to a specified port of an IP address on the local network. This allows you to setup an Internet service on the computer on the local network, without exposing it on the Internet directly. You can also build many sets of port redirection to provide many different Internet services on different local computers via a single Internet IP address.

Please click 'General Setup' tab at the top of web management interface, click 'NAT' tab at the left menu, and click 'Virtual Server' tab. The following message will be displayed on your web browser:

Enable Virtual Server 1

Private IP	Computer Name	Private Port	Type	Public Port	Comment
<input type="text"/>	<input type="text"/>	<input type="text"/>	Both	<input type="text"/>	<input type="text"/>

No.	Computer Name	Private IP	Private Port	Type	Public Port	Comment	Select

Here are descriptions of every setup items:

*Enable Virtual Server (1):* Check this box to enable virtual server, and uncheck this box to disable virtual server.

*Private IP (2):* Input the IP address of the computer which provides Internet service.

- Computer Name (3): Pull down the menu and all the computers connected to the router will be listed here. You can easily to select the computer name without checking the IP address of the computer.*
- Private Port (4): Input the port number of the IP address which provides Internet service.*
- Type (5): Select the type of connection, TCP or UDP. If you're not sure, please select 'Both'.*
- Public Port (6): Please select the port number of Internet IP address which will be redirected to the port number of local IP address defined above.*
- Comment (7): Please input any text to describe this mapping, up to 16 alphanumerical characters.*
- Add (8): Add the mapping to virtual server table.*
- Reset (9): Remove all inputted values.*
- Virtual Server Table (10): All existing virtual server mappings will be displayed here.*
- Delete Selected (11): Please select a virtual server mapping by clicking the 'Select' box of the mapping, then click 'Delete Selected' button to remove the mapping. If there's no existing mapping, this button will be grayed out.*
- Delete All (12): Delete all mappings existed in virtual server table.*
- Reset (13): Unselect all mappings.*
- 

After you finish with all settings, please click 'Apply' (14) button and the following message will be displayed on your web browser:

**Settings Saved Successfully!**

You may press Go Back button to continue configuring other settings or press APPLY button to restart the system to make the changes take effect.

Please click 'Continue' to go back to previous setup menu, or click 'Apply' to reboot the router so the settings will take effect (Please wait for about 30 seconds while router is rebooting).

If you want to reset all settings in this page back to previously-saved value, please click 'Cancel' button.

### 3-2-4 Port Mapping for Special Applications

Some applications require more than one connection at a time; these applications won't work with simple NAT rules. In order to make these applications work, you can use this function to let these applications work.

Please click 'General Setup' tab at the top of web management interface, click 'NAT' tab at the left menu, and click 'Special Applications' tab. The following message will be displayed on your web browser:

1  Enable Special Applications

2

IP Address	Computer Name	TCP Port to Open	UDP Port to Open	Comment
0.0.0.0	<< .....Select.....			
Popular Applications: Add	3	4	5	6
8		Select Game	Reset	Apply
		7	9	10

**Current Trigger-Port Table**

No.	Computer Name	IP Address	TCP Port to Open	UDP Port to Open	Comment	Select

Delete Delete All Reset

11 12 13

Cancel Apply 14

Here are descriptions of every setup items:

---

*Enable (1):* Check this box to enable special applications and uncheck this box to disable virtual server.

*Private IP (2):* Input the IP address of the computer which you want to open the ports.

*Computer Name (3):* Pull down the menu and all the computers connected to the router will be listed here. You can easily to select

*the computer name without checking the IP address of the computer.*

*TCP Port to Open (4): This is the out going (Outbound) range of TCP port numbers for this particular application.*

*UDP Port to Open (5): This is the out going (Outbound) range of UDP port numbers for this particular application.*

*Comment (6): The description of this setting.*

*Pop. Applications: (7): This section lists the more popular applications that require multiple connections. Select an application from the Popular Applications selection and click 'Add' to save the setting to 'Current Trigger-Port Table.'*

*Add (8): Add the setting to the 'Current Trigger-Port Table.'*

*Reset (9): Click 'Reset' will clear all above setting and you can set up again.*

*Current Trigger-Port (10): All the settings for the special applications will be listed here. If you want to remove some Special Application settings from the " Current Trigger-Port Table", select the Special Application settings you want to remove in the table and then click "Delete Selected". If you want remove all Special Application settings from the table, just click "Delete All" button. Click "Reset" will clear your current selections.*

*Delete Selected (11): Please select a special application by clicking the 'Select' box of the mapping, then click 'Delete Selected' button to remove the setting. If there's no setting here, this button will be grayed out.*

*Delete All (12): Delete all settings existed in trigger port table.*



*Reset (13): Unselect all settings.*

---

Note: Only one LAN client can use a particular special application at a time.

After you finish with all the settings, please click 'Apply' (14) button and the following message will be displayed on your web browser:

**Settings Saved Successfully!**

You may press Go Back button to continue configuring other settings or press APPLY button to restart the system to make the changes take effect.

Please click 'Go Back' to go back to previous setup menu, or click 'Apply' to reboot the router so the settings will take effect. Please wait for about 30-60 seconds while the router is rebooting.

### 3-2-5 UPnP Setting

This function enables network auto-configuration for peer-to-peer communications, with this function, network devices will be able to communicate with other devices directly, and learn about information about other devices. Many network device and applications rely on UPnP function nowadays.

Please click 'General Setup' tab at the top of web management interface, click 'NAT' tab at the left menu, and click 'UPnP Settings' tab. The following message will be displayed on your web browser:

#### UPnP Settings

UPnP is more than just a simple extension of the Plug and Play peripheral model. It is designed to support zero-configuration, "invisible" networking, and automatic discovery for a breadth of device categories from a wide range of vendors. With UPnP, a device can dynamically join a network, obtain an IP address, convey its capabilities, and learn about the presence and capabilities of other devices—all automatically; truly enabling zero configuration networks. Devices can subsequently communicate with each other directly; thereby further enabling peer to peer networking.

Note: This service may not function properly if your Repeater is behind another firewall.

UPnP Module:  Enable  Disable

There is only one option in this page, please select 'Enable' or 'Disable' to enable or disable UPnP function, then click 'Apply' button, and the following message will be displayed on your web browser:

#### Settings Saved Successfully!

You may press Go Back button to continue configuring other settings or press APPLY button to restart the system to make the changes take effect.

Please click 'Continue' to go back to previous setup menu, or click 'Apply' to reboot the router so the settings will take effect (Please

wait for about 30 seconds while router is rebooting).

### 3-2-6 ALG Settings

Application Layer Gateway (ALG) is a special function of this router. It includes many preset routing rules for numerous applications which require special support. With these supports, those applications which required special support will be able to work with NAT architecture.

Please click 'General Setup' tab at the top of web management interface, click 'NAT' tab at the left menu, and click 'ALG' tab. The following message will be displayed on your web browser:

#### Application Layer Gateway (ALG) Settings

Below are applications that need the Hi-Gain™ Wireless-N Router with Range Amplifier's special support to function properly under the NAT. Select the applications below.

Enable	Name	Comment
<input checked="" type="checkbox"/>	Amanda	Support for Amanda backup tool protocol.
<input checked="" type="checkbox"/>	Egg	Support for eggdrop bot networks.
<input checked="" type="checkbox"/>	FTP	Support for FTP.
<input checked="" type="checkbox"/>	H323	Support for H323/netmeeting.
<input checked="" type="checkbox"/>	IRC	Allows DCC to work though NAT and connection tracking.
<input checked="" type="checkbox"/>	MMS	Support for Microsoft Streaming Media Services protocol.
<input checked="" type="checkbox"/>	Quake3	Support for Quake III Arena connection tracking and nat.
<input checked="" type="checkbox"/>	Talk	Allows netfilter to track talk connections.
<input checked="" type="checkbox"/>	TFTP	Support for TFTP.
<input checked="" type="checkbox"/>	IPsec	Support for IPsec passthrough
<input type="checkbox"/>	Starcraft	Support for Starcraft/Battle.net game protocol.
<input type="checkbox"/>	MSN	Support for MSN file tranfer.
<input type="checkbox"/>	PPTP Pass Through	Support for PPTP passthrough.

There are many applications listed here. Please check the box of the special support for applications you need, and then click 'Apply' button and the following message will be displayed on your web browser:

**Settings Saved Successfully!**

You may press Go Back button to continue configuring other settings or press APPLY button to restart the system to make the changes take effect.


Please click 'Go Back' to go back to previous setup menu, or click 'Apply' to reboot the router so the settings will take effect. Please wait for about 30-60 seconds while router is rebooting.

### 3-3 Firewall


Besides NAT, this router also provides firewall function to block malicious intruders from accessing your computers on local network. These functions include inbound attack prevention, and block outbound traffics, like block URLs which have pre-defined keywords.

Please follow instructions to enable or disable firewall function:

Please click 'General Setup' tab at the top of web management interface, and then click 'Firewall' tab at the left menu. The following message will be displayed on your web browser:

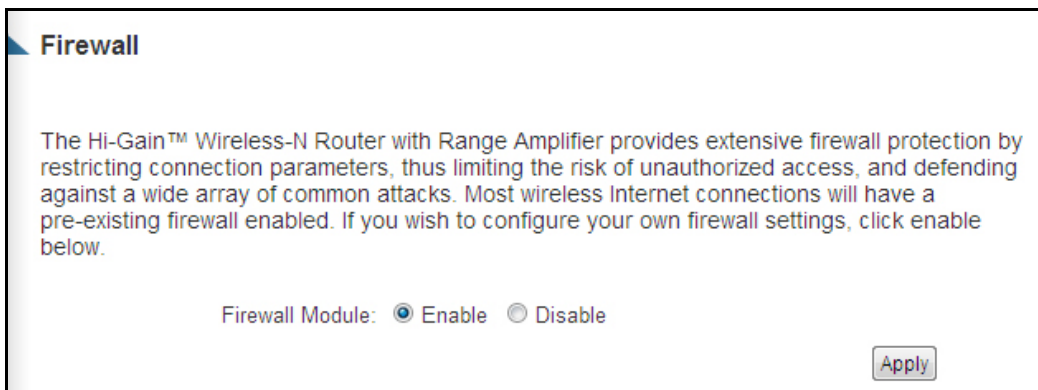

Please select 'Enable' or 'Disable' to enable or disable firewall function of this router, then click 'Apply' button, and the following message will be displayed on your web browser:

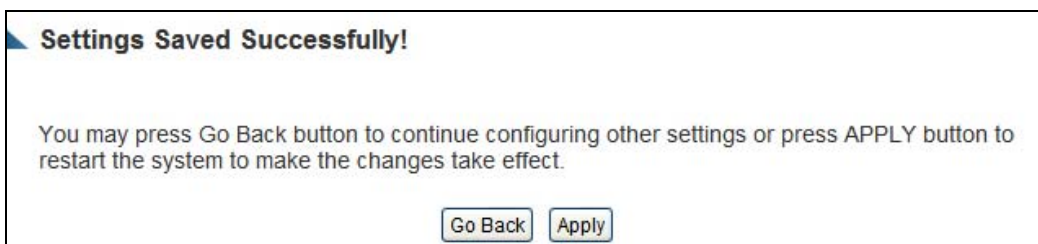

Please click 'Go Back' to go back to previous setup menu, or click 'Apply' to reboot the router so the settings will take effect. Please wait for about 30-60 seconds while router is rebooting.

### 3-3-1 Access Control

This function allows or denies computers with specific MAC address from connecting to the network; it can also allow or deny computers with specific IP address, protocol, or port.

Please click 'General Setup' tab at the top of web management interface, click 'Firewall' tab at the left menu, and click 'Access Control' tab. The following message will be displayed on your web browser:

**Access Control**

Access Control allows users to define the traffic type permitted or not permitted in your LAN. You can control which PC client uses what services in which they can have access to these services. If both of MAC filtering and IP filtering are enabled simultaneously, the MAC filtering table will be checked first and then IP filtering table.

1  Enable MAC Filtering

Client PC MAC Address	Computer Name	Comment
<input type="text"/>	<< -----Select----- >>	<input type="text"/>
	3	4
		5 6
<input type="button" value="Add"/> <input type="button" value="Reset"/>		

7 **Current MAC Filtering Table**

No.	Computer Name	Client PC MAC Address	Comment	Select
				<input type="button" value="Delete"/> <input type="button" value="Delete All"/> <input type="button" value="Reset"/>
				8 9 10

11  Enable IP Filtering

No.	Client PC Description	Client PC IP Address	Client Service	Protocol	Port Range	Select
						<input type="button" value="Add PC"/> <input type="button" value="Delete"/> <input type="button" value="Delete All"/>
						13 14 15
						<input type="button" value="Cancel"/> <input type="button" value="Apply"/> 16

Here are descriptions of every setup items:

---

*Enable MAC Filtering (1):* Check this box to enable MAC address based filtering, and please select 'Deny' or 'Allow' to decide the behavior of MAC filtering table. If you select deny, all MAC addresses listed in filtering table will be denied from connecting to the network; if you select allow, only MAC addresses listed in filtering table will be able to connect to the network, and rejecting all other network devices.

*Client PC MAC Address (2):* Please input the MAC address of computer or network device here, dash ( - ) or colon ( : ) are not required. (i.e. If the MAC address label of your wireless device indicates 'aa-bb-cc-dd-ee-ff' or 'aa:bb:cc:dd:ee:ff', just input 'aabbccddeeff')

*Computer Name (3):* Pull down the menu and all the computers connected to the router will be listed here. You can easily to select the computer name without checking the IP address of the computer.

*Comment (4):* You can input any text here as the comment of this MAC address, like 'ROOM 2A Computer' or anything. You can input up to 16 alphanumerical characters here. This is optional and you can leave it blank, however, it's recommended to use this field to write a comment for every MAC addresses as a memory aid.

*Add (5):* Click 'Add' button to add the MAC address and associated comment to the MAC address filtering table.

*Reset (6):* Remove all inputted values.

*MAC Filtering Table (7):* All existing MAC addresses in filtering table will be listed here.



- Delete Selected (8): If you want to delete a specific MAC address entry, check the 'select' box of the MAC address you want to delete, then click 'Delete Selected' button. (You can select more than one MAC addresses).*
- Delete All (9): If you want to delete all MAC addresses listed here, please click 'Delete All' button.*
- Reset (10): You can also click 'Reset' button to unselect all MAC addresses.*
- Enable IP Filtering Table (11): Check this box to enable IP address based filtering, and please select 'Deny' or 'Allow' to decide the behavior of IP filtering table. If you select deny, all IP addresses listed in filtering table will be denied from connecting to the network; if you select allow, only IP addresses listed in filtering table will be able to connect to the network, and rejecting all other network devices.*
- IP Filtering Table (12): All existing IP addresses in filtering table will be listed here.*
- Add PC (13): Click this button to add a new IP address to IP filtering table, up to 20 IP addresses can be added. Please refer to section 3-3-1-1 'Add PC' below.*
- Delete Selected (14): If you want to delete a specific IP address entry, check the 'select' box of the IP address you want to delete, then click 'Delete Selected' button. (You can select more than one IP addresses).*
- Delete All (15): If you want to delete all IP addresses listed here, please click 'Delete All' button.*
-

After you finish with all settings, please click 'Apply' (16) button and the following message will be displayed on your web browser:



Please click 'Go Back' to go back to previous setup menu, or click 'Apply' to reboot the router so the settings will take effect. Please wait for about 30-60 seconds while router is rebooting.

### 3-3-1-1 Add PC

After button is clicked, the following message will be displayed on your web browser:

**Access Control - Add PC**

This page allows users to define service limitation of client PC, including IP address and service type.

Client PC Description:  **a**

Client PC IP Address:  -  **b**

**C**

Client Service:		
Service Name	Detail Description	
WWW	HTTP, TCP Port 80, 3128, 8000, 8080, 8081	<input type="checkbox"/>
E-mail Sending	SMTP, TCP Port 25	<input type="checkbox"/>
News Forums	NNTP, TCP Port 119	<input type="checkbox"/>
E-mail Receiving	POP3, TCP Port 110	<input type="checkbox"/>
Secure HTTP	HTTPS, TCP Port 443	<input type="checkbox"/>
File Transfer	FTP, TCP Port 21	<input type="checkbox"/>
MSN Messenger	TCP Port 1863	<input type="checkbox"/>
Telnet Service	TCP Port 23	<input type="checkbox"/>
AIM	AOL Instant Messenger, TCP Port 5190	<input type="checkbox"/>
NetMeeting	H.323, TCP Port 389,522,1503,1720,1731	<input type="checkbox"/>
DNS	UDP Port 53	<input type="checkbox"/>
SNMP	UDP Port 161, 162	<input type="checkbox"/>
VPN-PPTP	TCP Port 1723	<input type="checkbox"/>
VPN-L2TP	UDP Port 1701	<input type="checkbox"/>
TCP	All TCP Port	<input type="checkbox"/>
UDP	All UDP Port	<input type="checkbox"/>

**User Define Service:**

Protocol: Both **d**

Port Range:  **e**

**f**

Here are descriptions of every setup items:

---

<i>Client PC Description (a):</i>	<i>Please input any text to describe this IP address, up to 16 alphanumerical characters.</i>
<i>Client PC IP address (b):</i>	<i>Please input the starting IP address in the left field, and input the end IP address in the right field to define a range of IP addresses, or just input the IP address in the left field to define a single IP address.</i>
<i>Client PC Service (c):</i>	<i>Please check all services you want to allow or deny this IP address to use, you can check multiple services.</i>
<i>Protocol (d):</i>	<i>If the service you need is not listed above, you can create a new service on your own. Please select TCP or UDP, if you're not sure, please select 'Both'.</i>
<i>Port Range (e):</i>	<i>Please input the port range of new service here. If you want to specify port 80 to 90, please input '80-90'; if you want to apply this rule on a single port, just input the port number, like '80'.</i>
<i>Add (f):</i>	<i>When you finish with all settings, please click 'Add' to save settings, you'll be brought back to previous menu, and the rule you just set will appear in current IP filtering table.</i>

---

### 3-3-2 URL Blocking

If you want to prevent computers in a local network from accessing certain website (like pornography, violence, or anything you want to block), you can use this function to stop computers in a local network from accessing the site you define here.

This function is useful for parents and company managers.

Please follow the following instructions to set URL blocking parameters:

Please click 'General Setup' tab at the top of web management interface, click 'Firewall' tab at the left menu, and click 'URL Blocking' tab. The following message will be displayed on your web browser:

1

The screenshot shows a web management interface for URL blocking. At the top, there is a checkbox labeled 'Enable URL Blocking' with a checkmark. Below it is a section titled 'URL/Keyword' containing a text input field with 'http://' and a 'Reset' button. To the right of the input field is a '2'. Below the input field are 'Reset' (3) and 'Add' (4) buttons. A section titled 'Current URL Blocking Table' (5) contains a table with three columns: 'No.', 'URL/Keyword', and 'Select'. Below the table are 'Delete' (6), 'Delete All' (7), and 'Reset' (8) buttons. At the bottom are 'Cancel' and 'Apply' (9) buttons.

Here are descriptions of every setup items:

---

*Enable URL Blocking (1):* Check this box to enforce URL Blocking, uncheck it to disable URL Blocking.

*URL/Keyword (2):* Input the URL (host name or IP address of website, like `http://www.blocked-site.com` or `http://11.22.33.44`), or

*the keyword which is contained in URL, such as pornography, cartoon, stock, etc.).*

**Add (3):** *Click 'Add' button to add the URL / keyword to the URL / Keyword filtering table.*

**Reset (4):** *Click 'Reset' to remove the value you inputted in URL/Keyword field.*

**Current URL Blocking Table (5):** *All existing URL/Keywords in filtering table will be listed here.*

**Delete Selected (6):** *If you want to delete a specific URL/Keyword entry, check the 'select' box of the MAC address you want to delete, then click 'Delete Selected' button. (You can select more than one MAC addresses).*

**Delete All (7):** *If you want to delete all URL/Keyword listed here, please click 'Delete All' button.*

**Reset (8):** *You can also click 'Reset' button to unselect all URL/Keywords.*

---

After you finish with all settings, please click 'Apply' (9) button, and the following message will be displayed on your web browser:



Please click 'Go Back' to go back to previous setup menu, or click 'Apply' to reboot the router so the settings will take effect. Please wait for about 30-60 seconds while router is rebooting.


### 3-3-3 DoS Attack Prevention

Denial of Service (DoS) is a common attack measure, by transmitting a great amount of data or request to your Internet IP address and server, the Internet connection will become very slow, and server may stop responding because it is not capable of handling too much traffic.

This router has a built-in DoS attack prevention mechanism; when you activate it, the router will stop the DoS attack for you.

Please follow the following instructions to set DoS prevention parameters:

Please click 'General Setup' tab at the top of web management interface, click 'Firewall' tab at the left menu, and click 'DoS' tab. The following message will be displayed on your web browser:

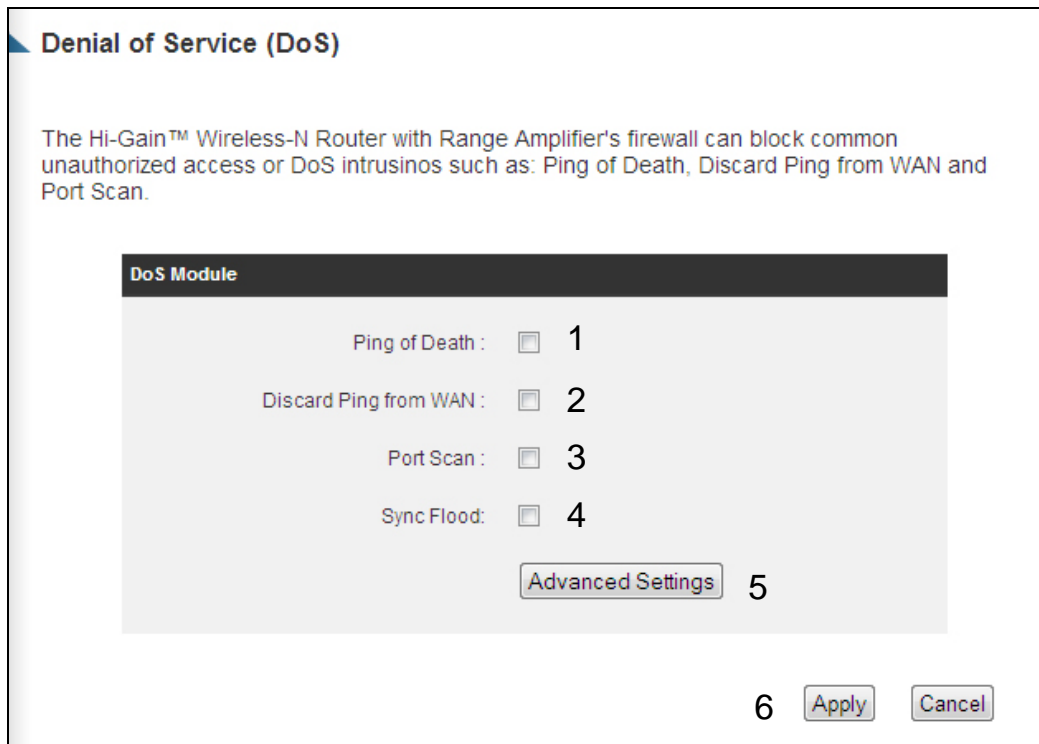

Here are descriptions of every setup items:

---

<i>Ping of Death (1):</i>	<i>Ping of Death is a special packet, and it will cause certain computer to stop responding. Check this box and the router will filter this kind of packet out.</i>
<i>Discard Ping From WAN (2):</i>	<i>Ping is a common and useful tool to know the connection status of a specified remote network device, but some malicious intruder will try to fill your network bandwidth with a lot of PING request data packet, to make your internet connection become very slow, even unusable. Check this box and the router will ignore all inbound PING request, but when you activate this function, you will not be able to ping your own router from internet, too.</i>
<i>Port Scan (3):</i>	<i>Some malicious intruder will try to use a 'port scanner' to know how many ports of your Internet IP address are open, and they can collect a lot of valuable information by doing so. Check this box and the router will block all traffics which are trying to scan your Internet IP address.</i>
<i>Sync Flood (4):</i>	<i>This is another kind of attack, which uses a lot of fake connection request to consume the memory of your server, and try to make your server become unusable. Check this box and the router will filter this kind of traffic out.</i>
<i>Advanced Settings (5):</i>	<i>Click this button and you can set advanced settings of the DoS prevention method listed above, please see section 3-3-3-1 'DoS – Advanced Settings' below.</i>

---

After you finish with all settings, please click 'Apply' (6) button and the following message will be displayed on your web browser:



**Settings Saved Successfully!**

You may press Go Back button to continue configuring other settings or press APPLY button to restart the system to make the changes take effect.

Please click 'Go Back' to go back to previous setup menu, or click 'Apply' to reboot the router so the settings will take effect. Please wait for about 30-60 seconds while router is rebooting.

### 3-3-3-1 DoS - Advanced Settings

When you click 'Advanced' button in DoS menu, the following message will be displayed on your web browser:

**Denial of Service (DoS) Firewall Settings**

The Hi-Gain™ Wireless-150N Router with Range Amplifier's firewall can block common unauthorized access, including Denial of Service (DoS) attacks such as Ping of Death, Discard Ping from WAN and Port Scan.

**DoS Module**

a  Ping of Death      5 Packet(s) per Second      Burst 5

b  Discard Ping from WAN

c  Port Scan

NMAP FIN / URG / PSH  
 Xmas tree  
 Another Xmas tree  
 Null scan  
 SYN / RST  
 SYN / FIN  
 SYN (only unreachable port)

d  Sync Flood      30 Packet(s) per Second      Burst 30

6

Here are descriptions of every setup items:

---

*Ping of Death (a): Set the threshold of when this DoS prevention mechanism will be activated. Please check the box of Ping of Death, and input the frequency of threshold (how many packets per second, minute, or hour), you can also input the 'Burst' value, which means when this number of 'Ping of Death' packet is received in very short time, this DoS prevention mechanism will be activated.*

*Discard Ping mechanism. Check the box to activate this DoS prevention mechanism.*  
*From WAN (b):*

*Port Scan (c): Many kind of port scan methods are listed here, please check one or more DoS attack methods you want to prevent.*

*Sync Flood (d): Like Ping of Death, you can set the threshold of when this DoS prevention mechanism will be activated.*

---

After you finish with all settings, please click 'Apply' (6) button and the following message will be displayed on your web browser:



Please click 'Go Back' to go back to previous setup menu, or click 'Apply' to reboot the router so the settings will take effect. Please wait for about 30-60 seconds while router is rebooting.

### 3-3-4 Demilitarized Zone (DMZ)

Demilitarized Zone (DMZ) refers to a special area in your local network. This area resides in the local network, and all computers in this area use private IP addresses, too. However, these private IP addresses are mapped to a certain Internet IP address, so other users on the Internet can fully access those computers in DMZ.

Please follow the instructions to set DMZ parameters:

Please click 'General Setup' tab at the top of web management interface, click 'Firewall' tab at the left menu, and click 'DMZ' tab.

The following message will be displayed on your web browser:

1

1

Enable DMZ

Public IP	Client PC IP Address	Computer Name
<input checked="" type="radio"/> Dynamic IP 2 <input type="text" value="Session 1"/> <input type="text" value="3"/> <input type="text" value="4"/>		<input type="text" value="5"/> <input type="text" value="6"/>
<input type="radio"/> Static IP <input type="text" value="3"/>		<input type="text" value="4"/>

7

No.	Computer Name	Public IP	Client IP Address	Select
8				9 10

11

Here are descriptions of every setup items:

---

<i>Enable DMZ (1):</i>	<i>Check this box to enable DMZ function, uncheck this box to disable DMZ function.</i>
<i>Public IP address (2):</i>	<i>You can select 'Dynamic IP' or 'Static IP' here. If you select 'Dynamic IP', you have to select an Internet connection session from dropdown menu; if you select 'Static IP', please input the IP address that you want to map to a specific private IP address.</i>
<i>Client PC IP address (3):</i>	<i>Please input the private IP address that the Internet IP Address will be mapped to.</i>
<i>Computer Name (4):</i>	<i>Pull down the menu and all the computers connected to the router will be listed here. You can easily to select the computer name without checking the IP address of the computer.</i>
<i>Add (5):</i>	<i>Click 'Add' button to add the public IP address and associated private IP address to the DMZ table.</i>
<i>Reset (6):</i>	<i>Click 'Clear' to remove the value you inputted in Public IP address and Client PC IP address field.</i>
<i>Current DMZ table (7):</i>	<i>All existing public IP address and private IP Address mapping will be displayed here.</i>
<i>Delete Selected (8):</i>	<i>If you want to delete a specific DMZ entry, check the 'select' box of the DMZ entry you want to delete, then click 'Delete Selected' button. (You can select more than one DMZ entries).</i>
<i>Delete All (9):</i>	<i>If you want to delete all DMZ entries listed here, please click 'Delete All' button.</i>
<i>Reset (10):</i>	<i>You can also click 'Reset' button to unselect all DMZ entries.</i>

---

After you finish with all settings, please click 'Apply' (11) button and the following message will be displayed on your web browser:



Please click 'Go Back' to go back to previous setup menu, or click 'Apply' to reboot the router so the settings will take effect. Please wait for about 30 seconds while router is rebooting.


## 3-4 System Status

The functions described here will provide you with system related information. To enter system status menu, please either click 'Status' link located at top of web management interface.

### 3-4-1 System information and firmware version

You can use this function to know the system information and firmware version of this router.

Please click 'Status' tab at the top of web management interface, and the following message will be displayed on your web browser:

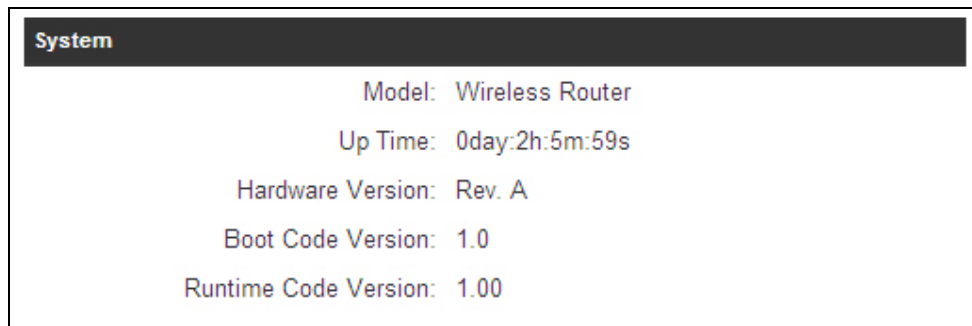

**NOTE: Information displayed here may vary.**

### **3-4-2 Internet Connection Status**

You can use this function to know the status of current Internet connection.

Please click 'Status' menu at the top of web management interface, and then click 'Internet Connection' tab on the left menu. The following message will be displayed on your web browser:

#### Internet Connection

View the current Internet connection status and related information.

Attain IP Protocol : Dynamic IP disconnect

IP Address :

Subnet Mask :

Default Gateway :

MAC Address :

Primary DNS :

Secondary DNS :

**NOTE: Information displayed here may vary.**

### 3-4-3 Home Network

You can use this function to know the status of your router.

Please click 'Status' tab at top of web management interface, and then click 'Home Network' tab on the left menu. The following message will be displayed on your web browser:

Wireless Network Configuration	
Mode:	Access Point
ESSID:	Hawking_150N
Channel Number:	11
Security:	Disable

Local Network Configuration	
IP Address:	0.0.0.0
Subnet Mask:	255.255.255.0
DHCP Server:	Enable
MAC Address:	00:00:00:00:00:00


**NOTE: Information displayed here may vary.**



### 3-4-4 System Log

All important system events are logged. You can use this function to check the event log of your router.

Please click 'Status' tab at the top of web management interface, and then click 'System Log' tab on the left menu. The following message will be displayed on your web browser:

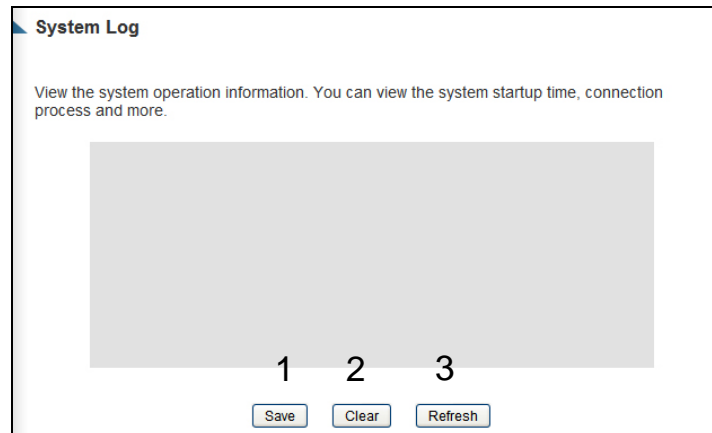

The system events will be displayed in this page, and here are descriptions of every buttons:

---

*Save (1): Save current event log to a text file.*

*Clear (2): Delete all event logs displayed here.*


*Refresh (3): Refresh the event log display.*

---

### 3-4-5 Security Log

All information about network and system security is kept here, and you can use this function to check the security event log of your router.

Please click 'Status' tab at the top of web management interface, and then click 'Security Log' tab on the left menu. The following message will be displayed on your web browser:

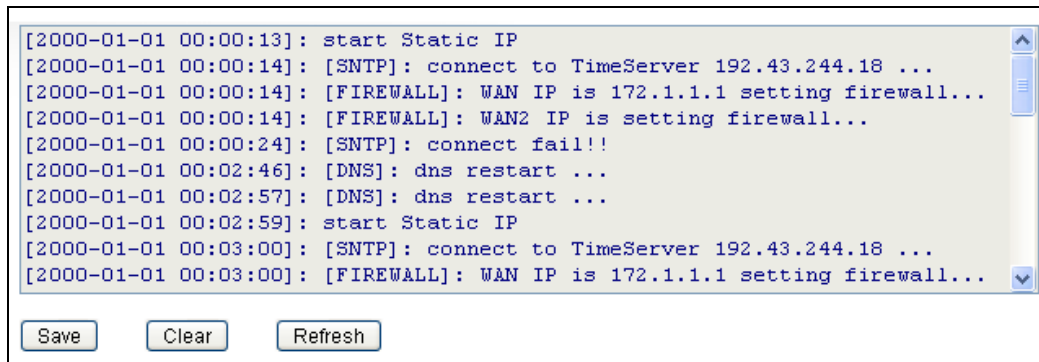

The screenshot shows a web browser window displaying a security log. The log contains several entries with timestamps and system messages. Below the log, there are three buttons: 'Save', 'Clear', and 'Refresh'. The log entries are as follows:

```
[2000-01-01 00:00:13]: start Static IP
[2000-01-01 00:00:14]: [SNTP]: connect to TimeServer 192.43.244.18 ...
[2000-01-01 00:00:14]: [FIREWALL]: WAN IP is 172.1.1.1 setting firewall...
[2000-01-01 00:00:14]: [FIREWALL]: WAN2 IP is setting firewall...
[2000-01-01 00:00:24]: [SNTP]: connect fail!!
[2000-01-01 00:02:46]: [DNS]: dns restart ...
[2000-01-01 00:02:57]: [DNS]: dns restart ...
[2000-01-01 00:02:59]: start Static IP
[2000-01-01 00:03:00]: [SNTP]: connect to TimeServer 192.43.244.18 ...
[2000-01-01 00:03:00]: [FIREWALL]: WAN IP is 172.1.1.1 setting firewall...
```

1            2            3

The system events will be displayed in this page, and here are descriptions of every buttons:

---

*Save (1):                      Save current event log to a text file.*

*Clear (2):                     Delete all event logs displayed here.*

---


*Refresh (3):                  Refresh the event log display.*

---

### 3-4-5 Active DHCP client list

If you're using the DHCP server function of this router, you can use this function to check all active DHCP leases issued by this router.

Please click 'Status' tab at the top of web management interface, and then click 'Active DHCP client' tab on the left menu. The following message will be displayed on your web browser:

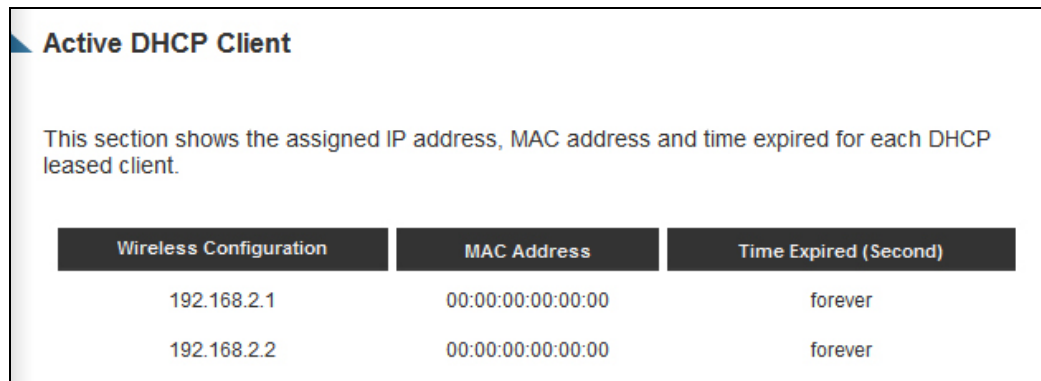

**Active DHCP Client**

This section shows the assigned IP address, MAC address and time expired for each DHCP leased client.


Wireless Configuration	MAC Address	Time Expired (Second)
192.168.2.1	00:00:00:00:00:00	forever
192.168.2.2	00:00:00:00:00:00	forever

All information about active DHCP leases issued by this router will be displayed here. You can click 'Refresh' button to display latest information.

### 3-4-6 Statistics

You can use this function to check the statistics of wireless, LAN, and WAN interface of this router.

Please click 'Status' tab at the top of web management interface, then click 'Statistics' tab on the left menu. The following message will be displayed on your web browser:

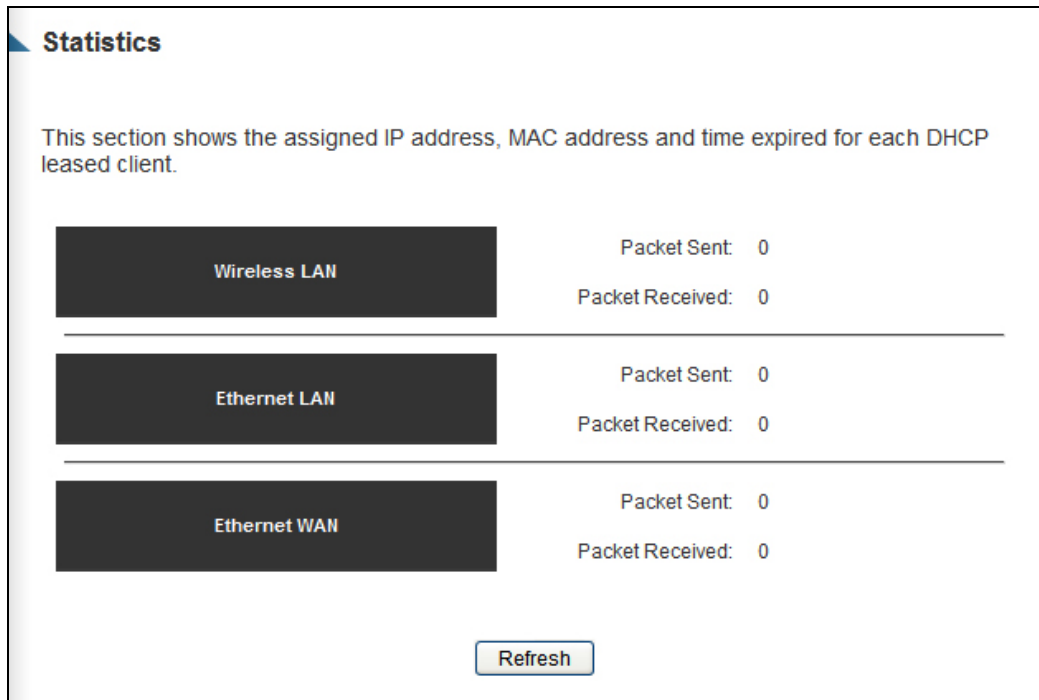

**Statistics**

This section shows the assigned IP address, MAC address and time expired for each DHCP leased client.

Wireless LAN	Packet Sent: 0
	Packet Received: 0
Ethernet LAN	Packet Sent: 0
	Packet Received: 0
Ethernet WAN	Packet Sent: 0
	Packet Received: 0

You can click 'Refresh' button to display latest information.

### 3-5 Tools

You can backup all configurations of this router to a file, so you can make several copied of router configuration for security reason.

To backup or restore router configuration, please follow the instructions:

Please click 'Tools' tab located at the top of web management interface, and then click 'Configuration Tools' tab on the left menu. The following message will be displayed on your web browser:

**Configuration Tools**

Use the "Backup" tool to save the Hi-Gain™ Wireless-N Router with Range Amplifier's current configurations to a file named "config.bin". You can then use the "Restore" tool to restore the saved configuration to the Router. Alternatively, you can use the "Restore to Factory Default" tool to force the Router to perform System Reset and restore the original factory settings.

Backup Settings  1

---

Restore Settings    2

Restore to Factory Default  3

Here are descriptions of every buttons:

---

<i>Backup Settings (1):</i>	<i>Press 'Save...' button, and you'll be prompted to download the configuration as a file, default filename is 'default.bin', you can please save it as another filename for different versions, and keep it in a safe place.</i>
<i>Restore Settings (2):</i>	<i>Press 'Browse...' to pick a previously-saved configuration file from your computer, and then click 'Upload' to transfer the configuration file to router. After the configuration is uploaded, the router's configuration will be replaced by the file you just uploaded.</i>

*Restore to Factory Default (3):* *Click this button to remove all settings you made, and restore the configuration of this router back to factory default settings.*

---

### 3-6 Firmware Upgrade

The system software used by this router is known as 'firmware', just like any applications on your computer, when you replace the old application with a new one; your computer will be equipped with new function. You can also use this firmware upgrade function to add new functions to your router, even fix the bugs of this router.

To upgrade firmware, please follow the instructions:

Please click 'Tools' tab located at the top of web management interface, and then click 'Firmware Upgrade' tab on the left menu. The following message will be displayed on your web browser:

**Firmware Upgrade**

This tool allows you to upgrade the Hi-Gain™ Wireless-150N Router with Range Amplifier's system firmware. Enter the path and name of the upgrade file and then click the APPLY button below. You will be prompted to confirm the upgrade.

The system will automatically reboot the Router after you finished the firmware upgrade process. If you don't complete the firmware upgrade process in the next step, you have to manually restart the Router.

Click 'Next' button if you wish to upgrade your firmware.

**Firmware Upgrade**

This tool allows you to upgrade the Hi-Gain™ Wireless-150N Router with Range Amplifier's system firmware. Enter the path and name of the upgrade file and then click the Apply button below. You will be prompted to confirm the upgrade.

Click 'Browse' button, and you'll be prompted to provide the filename of the firmware upgrade file. Please download the latest firmware file from the Hawking Technologies website at [www.hawkingtech.com](http://www.hawkingtech.com), and use it to upgrade your router.

After a firmware upgrade file is selected, click 'Apply' button, and the router will start firmware upgrade procedure automatically. The procedure may take several minutes, please be patient.


**NOTE: Never interrupt the upgrade procedure by closing the web browser or physically disconnect your computer from router. If the firmware you uploaded is corrupt, the firmware upgrade will fail, and you may have to return this router to the dealer of purchase to ask for help. Warranty is void if you interrupt the upgrade procedure.**



### 3-7 System Reset

If you think your network performance is bad, or you find the behavior of the router is strange, you can perform a router reset. Sometimes it will solve the problem.

Please click 'Tools' tab located at the top of web management interface, and then click 'Reset' tab on the left menu. The following message will be displayed on your web browser:

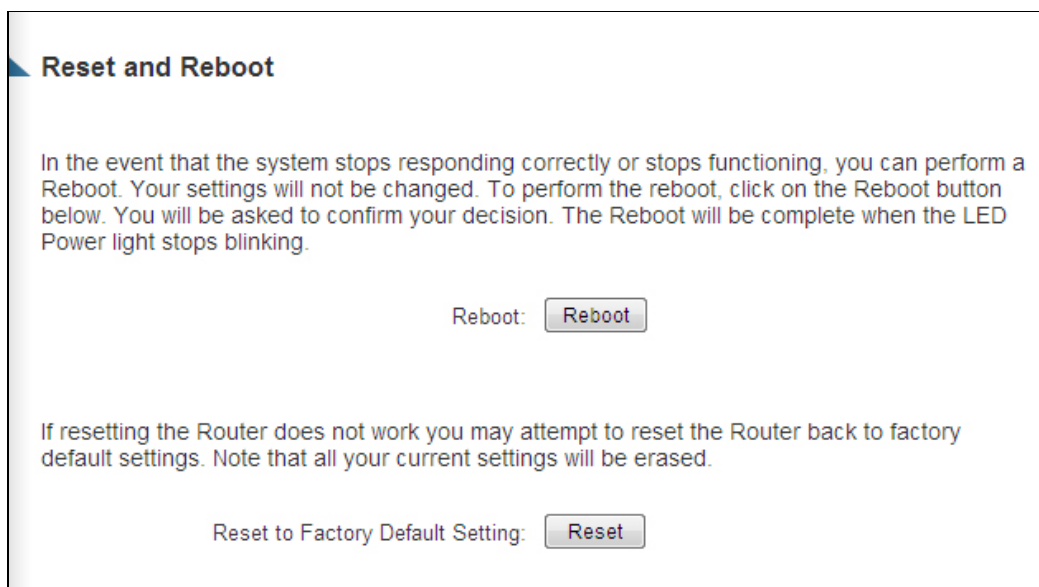

Please click 'Apply' to reset your router, and it will be available again after a few minutes, please be patient.

## *Chapter IV: Appendix*

### 4-1 Hardware Specification

Switch: IC+ IP175C (5 Port Switch)

Flash: 4MB

SDRAM: 16MB

WAN Port: 10/100M UTP Port x 1

LAN Ports: 10/100M UTP Port x 4

Antenna: 2x 3dBi Dipole antennas

Power: 12VDC, 1A Switching Power Adapter

Dimension: 30(H) x 187(W) x 100(D) mm

Transmit Power: Up to 24dBm

Temperature: 32~104°F (0 ~ 40°C)

Humidity: 10-90% (NonCondensing)

Certification: FCC, CE

## 4-2 Troubleshooting

If you found the router is working improperly or stops responding to you, don't panic! Before you contact your dealer of purchase for help, please read this troubleshooting first. Some problems can be solved by yourself within very short time!

Scenario	Solution
Router is not responding to me when I want to access it by web browser	<ol style="list-style-type: none"><li>a. Please check the connection of power cords and network cables of this router. All cords and cables should be correctly and firmly inserted into the router.</li><li>b. If all LEDs on this router are off, please check the status of A/C power adapter, and make sure it's correctly powered.</li><li>c. You must use the same IP address section which router uses.</li><li>d. Are you using MAC or IP address filter? Try to connect the router by another computer and see if it works; if not, please restore your router to factory default settings (pressing 'reset' button for over 10 seconds).</li><li>e. Set your computer to obtain an IP address automatically (DHCP), and see if your computer can get an IP address.</li><li>f. If you did a firmware upgrade and this happens, contact your dealer of purchase for help.</li><li>g. If all above solutions don't work, contact the dealer of purchase for help.</li></ol>
Can't get connected to Internet	<ol style="list-style-type: none"><li>a. Go to 'Status' -&gt; 'Internet Connection' menu, and check Internet connection status.</li><li>b. Please be patient, sometimes Internet is just that slow.</li><li>c. If you connect a computer to Internet directly before, try to do that again, and</li></ol>

	<p>check if you can get connected to Internet with your computer directly attached to the device provided by your Internet service provider.</p> <ul style="list-style-type: none"> <li>d. Check PPPoE / L2TP / PPTP user ID and password again.</li> <li>e. Call your Internet service provide and check if there's something wrong with their service.</li> <li>f. If you just can't connect to one or more websites, but you can still use other internet services, please check URL/Keyword filter.</li> <li>g. Try to reset the router and try again later.</li> <li>h. Reset the device (modem) provided by your Internet service provider.</li> <li>i. Try to use IP address instead of hostname. If you can use IP address to communicate with a remote server, but can't use hostname, please check DNS setting.</li> </ul>
<p>I can't locate my router by my wireless client</p>	<ul style="list-style-type: none"> <li>a. 'Broadcast ESSID' set to off?</li> <li>b. All three antennas are properly secured.</li> <li>c. Are you too far from your router? Try to get closer.</li> <li>d. Please remember that you have to input ESSID on your wireless client manually, if ESSID broadcast is disabled.</li> </ul>
<p>File download is very slow or breaks frequently</p>	<ul style="list-style-type: none"> <li>a. Are you using QoS function? Try to disable it and try again.</li> <li>b. Internet is slow sometimes, be patient.</li> <li>c. Try to reset the router and see if it's better after that.</li> <li>d. Try to know what computers do on your local network. If someone's transferring big files, other people will think Internet is really slow.</li> </ul>

	<p>e. If this has never happened before, call your Internet service provider to know if there is something wrong with their network.</p>
<p>I can't log onto web management interface: password is wrong</p>	<p>a. Make sure you're connecting to the correct IP address of the router!</p> <p>b. Password is case-sensitive. Make sure the 'Caps Lock' light is not illuminated.</p> <p>c. If you really forgot the password, do a hard reset.</p>
<p>Router becomes hot</p>	<p>a. This is not a malfunction, as long as it is not so hot that you cannot touch it for a prolonged period of time</p> <p>b. If you smell something wrong or see smoke coming out from router or A/C power adapter, please disconnect the router and A/C power adapter from utility power (make sure it's safe before you're doing this!), and call your dealer of purchase for help.</p>
<p>The date and time of all event logs are wrong</p>	<p>a. Adjust the internal clock of router.</p>

## 4-3 Glossary

**Default Gateway (Router):** Every non-router IP device needs to configure a default gateway's IP address. When the device sends out an IP packet, if the destination is not on the same network, the device has to send the packet to its default gateway, which will then send it out towards the destination.

**DHCP:** Dynamic Host Configuration Protocol. This protocol automatically gives every computer on your home network an IP address.

**DNS Server IP Address:** DNS stands for Domain Name System, which allows Internet servers to have a domain name (such as `www.Broadbandrouter.com`) and one or more IP addresses (such as `192.34.45.8`). A DNS server keeps a database of Internet servers and their respective domain names and IP addresses, so that when a domain name is requested (as in typing "Broadbandrouter.com" into your Internet browser), the user is sent to the proper IP address. The DNS server IP address used by the computers on your home network is the location of the DNS server your ISP has assigned to you.

**DSL Modem:** DSL stands for Digital Subscriber Line. A DSL modem uses your existing phone lines to transmit data at high speeds.

**Ethernet:** A standard for computer networks. Ethernet networks are connected by special cables and hubs, and move data around at up to 10/100 million bits per second (Mbps).

**Idle Timeout:** Idle Timeout is designed so that after there is no traffic to the Internet for a pre-configured amount of time, the connection will automatically be disconnected.

**IP Address and Network (Subnet) Mask:** IP stands for Internet Protocol. An IP address consists of a series of four numbers separated by periods, which identifies a single, unique Internet computer host in an IP network. Example: `192.168.1.254`. It consists of 2 portions: the IP network address, and the host identifier.

The IP address is a 32-bit binary pattern, which can be represented as four cascaded decimal numbers separated by ".": `aaa.aaa.aaa.aaa`, where each "aaa" can be anything from 000 to 255, or as four cascaded binary numbers

separated by ".": bbbbbb.bbbbbbb.bbbbbbb.bbbbbbb, where each "b" can either be 0 or 1.

A network mask is also a 32-bit binary pattern, and consists of consecutive leading

1's followed by consecutive trailing 0's, such as

11111111.11111111.11111111.00000000. Therefore sometimes a network mask can also be described simply as "x" number of leading 1's.

When both are represented side by side in their binary forms, all bits in the IP address that correspond to 1's in the network mask become part of the IP network address, and the remaining bits correspond to the host ID.

For example, if the IP address for a device is, in its binary form,

11011001.10110000.10010000.00000111, and if its network mask is, 11111111.11111111.11110000.00000000

It means the device's network address is

11011001.10110000.10010000.00000000, and its host ID is, 00000000.00000000.00000000.00000111. This is a convenient and efficient method for routers to route IP packets to their destination.

**ISP Gateway Address:** (see ISP for definition). The ISP Gateway Address is an IP address for the Internet router located at the ISP's office.

**ISP:** Internet Service Provider. An ISP is a business that provides connectivity to the Internet for individuals and other businesses or organizations.

**LAN:** Local Area Network. A LAN is a group of computers and devices connected together in a relatively small area (such as a house or an office). Your home network is considered a LAN.

**MAC Address:** MAC stands for Media Access Control. A MAC address is the hardware address of a device connected to a network. The MAC address is a unique identifier for a device with an Ethernet interface. It is comprised of two parts: 3 bytes of data that corresponds to the Manufacturer ID (unique for each manufacturer), plus 3 bytes that are often used as the product's serial number.

**NAT:** Network Address Translation. This process allows all of the computers on your home network to use one IP address. Using the broadband router's NAT capability, you can access the Internet from any computer on your home network without having to purchase more IP addresses from your ISP.

**Port:** Network Clients (LAN PC) uses port numbers to distinguish one network application/protocol over another. Below is a list of common applications and protocol/port numbers:

Application	Protocol	Port Number
Telnet	TCP	23
FTP	TCP	21
SMTP	TCP	25
POP3	TCP	110
H.323	TCP	1720
SNMP	UCP	161
SNMP Trap	UDP	162
HTTP	TCP	80
PPTP	TCP	1723
PC Anywhere	TCP	5631
PC Anywhere	UDP	5632

**PPPoE:** Point-to-Point Protocol over Ethernet. Point-to-Point Protocol is a secure data transmission method originally created for dial-up connections; PPPoE is for Ethernet connections. PPPoE relies on two widely accepted standards, Ethernet and the Point-to-Point Protocol. It is a communications protocol for transmitting information over Ethernet between different manufacturers

**Protocol:** A protocol is a set of rules for interaction agreed upon between multiple parties so that when they interface with each other based on such a protocol, the interpretation of their behavior is well defined and can be made objectively, without confusion or misunderstanding.

**Router:** A router is an intelligent network device that forwards packets between different networks based on network layer address information such as IP addresses.

**Subnet Mask:** A subnet mask, which may be a part of the TCP/IP information provided by your ISP, is a set of four numbers (e.g. 255.255.255.0) configured



like an IP address. It is used to create IP address numbers used only within a particular network (as opposed to valid IP address numbers recognized by the Internet, which must be assigned by InterNIC).

**TCP/IP, UDP:** Transmission Control Protocol/Internet Protocol (TCP/IP) and Unreliable Datagram Protocol (UDP). TCP/IP is the standard protocol for data transmission over the Internet. Both TCP and UDP are transport layer protocol. TCP performs proper error detection and error recovery, and thus is reliable. UDP on the other hand is not reliable. They both run on top of the IP (Internet Protocol), a network layer protocol.

**WAN:** Wide Area Network. A network that connects computers located in geographically separate areas (e.g. different buildings, cities, countries). The Internet is a wide area network.

**Web-based management Graphical User Interface (GUI):** Many devices support a graphical user interface that is based on the web browser. This means the user can use the familiar Netscape or Microsoft Internet Explorer to Control/configure or monitor the device being managed.